


Transformer Terminals Blocks

TRV 4

Width: 7,5 mm

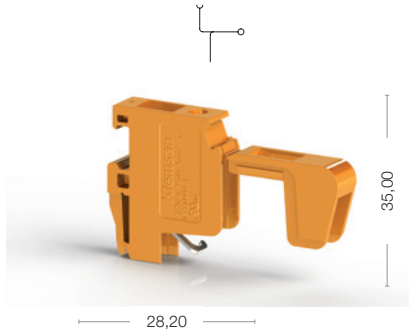


Cat No:

422 017

TRV 4 B

Width: 7,5 mm

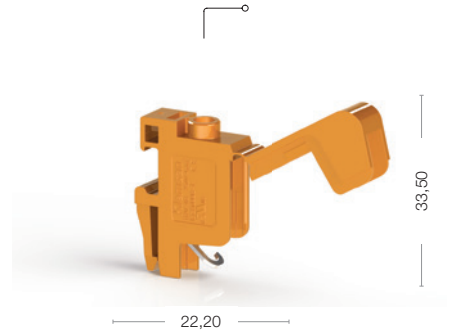

Cat No:

422 057



Electrical Ratings	Voltage, V ~	Current, A	Cross-Section	Voltage, V ~	Current, A	Cross-Section
CE (EN 60947-7-1 - EN 60947-7-2)	750	25	4 mm²	750	25	4 mm²
UL	600	20	AWG 26-10	600	20	AWG 26-10
VDE (IEC 60947-7-1)						
CSA						
ATEX						
Connection Data						
Conductor cross section solid (min-max.)	0,2-6 mm²			0,2-6 mm²		
Conductor cross section stranded (min.-max.)	0,2-6 mm²			0,2-6 mm²		
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, (min-max.)	0,5-2,5 mm²			0,5-2,5 mm²		
AWG Conductor	AWG 24-10			AWG 24-10		
Insulation Stripping Length (min.-max.)	9-10 mm			9-10 mm		
Torque (min-max.)	0,5-0,8 Nm			0,5-0,8 Nm		
Screwdriver	IKTD 3 (0,6x3,5)			IKTD 3 (0,6x3,5)		
Technical Data						
Rated Impulse Voltage / Pollution severity	8/3			8/3		
Insulation material group / Gauge pin code according to IEC 60947-1	1/B4			1/A4		
Protection class / Protection conductor type	IP 20 / -			IP 20 / -		
Marking Tags (Dekafix)						
See pages 326-333 for a list of Dekafix	DB 7,5x4,5, DG 7/5, D-NS 7x5			DB 7,5x4,5, DG 7/5, D-NS 7x5		
Package Quantity						
	50 pcs.			50 pcs.		

Color			
Color code is the last digit of the order number			
Grey	Green- Yellow	Orange	Beige
304 119	60	17	10