


WGO Series

Test / Disconnect

Terminals

WGO 1

Width: 8 mm

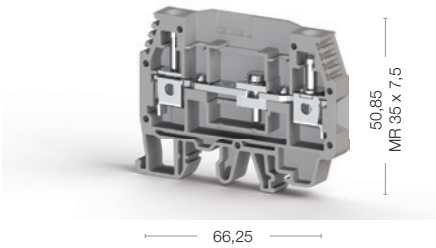


Cat No:

370 590
370 500

WGL 1

Width: 8 mm

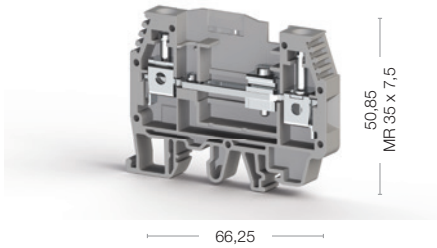

Cat No:


375 790
375 700



Electrical Ratings
CE (EN 60947-7-1)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Connection Data
Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, (min.-max.)
AWG Conductor
Insulation Stripping Length (min.-max.)
Torque (min.-max.)
Screwdriver

Ordering Data
Without Socket - Beige / Grey
One Socket - Beige / Grey
Double Socket - Beige / Grey
One Test Socket - Beige / Grey
Double Test Socket - Beige / Grey

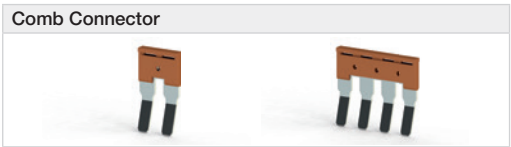

Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix
Package Quantity

Voltage, V ~	Current, A	Cross-Section
400	41	6 mm ²
300	50	AWG 20-8
250	36	1,5-6 mm ²

0,2-10 mm ²
0,2-10 mm ²
0,5-4 mm ²
AWG 24-8
10-12 mm
0,8-1,2 Nm
IKTD 4 (0,8x4,0)

Type	Order No	Qty.
WGO 1	370 500 - 590	60
WGO 1	370 501 - 591	60
WGO 1	370 503 - 593	60
WGO 1	370 502 - 592	60

Type	Order No	Qty.
NPP/WGO 1	450 109	25

Type	Order No	Qty.
IZUK 6/2	476 302	10
IZUK 6/3	476 303	10
IZUK 6/4	476 304	10
IZUK 6/6	476 306	10
IZUK 6/10	476 309	5
WGO UAA	498 300	1

Type	Order No	Qty.
TF (Ø4)	493 050	10

Type	Order No	Qty.
TKO 6/2	476 282	25
TKO 6/3	476 283	20
TKO 6/4	476 284	15
TKO 6/10	476 289	5

6/3
1/B5
IP 20 / -
D-NS 8x10, DG 10/8
60 pcs.

Voltage, V ~	Current, A	Cross-Section
400	41	6 mm ²
300	50	AWG 20-8
400	36	0,5-10 mm ²

0,2-10 mm ²
0,2-10 mm ²
0,5-4 mm ²
AWG 24-8
10-12 mm
0,8-1,2 Nm
IKTD 4 (0,8x4,0)

Type	Order No	Qty.
WGL 1	375 700 - 790	60
WGL 1	375 701 - 791	60
WGL 1	375 702 - 792	60

Type	Order No	Qty.
NPP/WGO 1	450 109	25

Type	Order No	Qty.
IZUK 6/2	476 302	10
IZUK 6/3	476 303	10
IZUK 6/4	476 304	10
IZUK 6/6	476 306	10
IZUK 6/10	476 309	5
WGO UAA	498 300	1

Type	Order No	Qty.
TF (Ø4)	493 050	10

Type	Order No	Qty.
TKO 6/2	476 282	25
TKO 6/3	476 283	20
TKO 6/4	476 284	15
TKO 6/10	476 289	5

6/3
1/B5
IP 20 / -
D-NS 8x10, DG 10/8
60 pcs.