


WGO Series

Test / Disconnect

Terminals

WGO 2 IR

Width: 10 mm

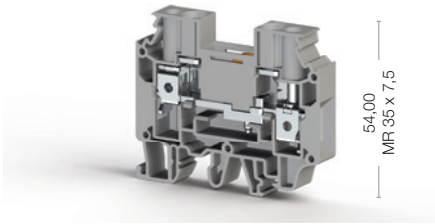

54,00
MR 35 x 7,5


64,25

Cat No:

375 909
375 900

WGO 4

Width: 8 mm

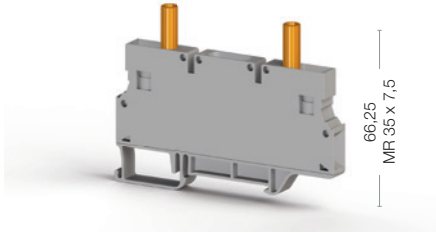

66,25
MR 35 x 7,5

88,30

Cat No:

376 090
376 000



Electrical Ratings
CE (EN 60947-7-1)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Connection Data
Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, (min.-max.)
AWG Conductor
Insulation Stripping Length (min.-max.)
Torque (min.-max.)
Screwdriver

Ordering Data
Without Socket - Beige / Grey
One Socket - Beige / Grey
Double Socket - Beige / Grey
One Test Socket - Beige / Grey
Double Test Socket - Beige / Grey

End Plate
Grey Beige

Cross Connection

Test Plug

Comb Connector

Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

Package Quantity

Voltage, V ~	Current, A	Cross-Section
500	57	10 mm ²
400	50	1,5-10 mm ²

	0,5-16 mm ²
	0,5-16 mm ²
	0,5-6 mm ²
	AWG 20-6
	10-12 mm
	1,2-1,8 Nm
	IKTD 4 (0,8x4,0)

Type	Order No	Qty.
WGO 2 IR	375 900 - 909	50

Type	Order No	Qty.
NPP/WGO 2 IR	450 249	25

Type	Order No	Qty.
IZUK 10W/2	476 502	10
IZUK 10W/3	476 503	10
IZUK 10W/4	476 504	10
IZUK 10W/6	476 506	10
IZUK 10W/10	476 509	5

Type	Order No	Qty.
TF (Q4)	493 050	10

Type	Order No	Qty.
TKO 10/2	476 292	25
TKO 10/3	476 293	20
TKO 10/4	476 294	15
TKO 10/10	476 299	5

6/3
1/B6
IP 20 / -
D-NS 10x10, DG 10/10, SLF-P1 W

50 pcs.

Voltage, V ~	Current, A	Cross-Section
1000	41	6 mm ²
1000	41	6 mm ²
400	36	0,5-10 mm ²

	0,2-10 mm ²
	0,2-10 mm ²
	0,5-4 mm ²
	AWG 24-8
	10-12 mm
	0,8-1,0 Nm
	IKTD 4 (0,8x4,0)

Type	Order No	Qty.
WGO 4 (GREY)	376 091	50
WGO 4 (Grey)	376 090	50

Type	Order No	Qty.

Type	Order No	Qty.
IZUK 6/2	476 302	10
IZUK 6/3	476 303	10
IZUK 6/4	476 304	10
IZUK 6/6	476 306	10
IZUK 6/10	476 309	5

Type	Order No	Qty.
TF (Ø4)	493 050	10

Type	Order No	Qty.
UK 6/2	476 242	25
UK 6/3	476 243	20
UK 6/4	476 244	15
UK 6/10	476 249	5

6/3
1/B5
IP 20 / -
D-NS 8x10, DG 10/8, SLF-P1 W, KCSLF-W 11,2x100mm

50 pcs.
