


WGO Y Series

Test / Disconnect

Terminals

WGO Y 6

Width: 8 mm

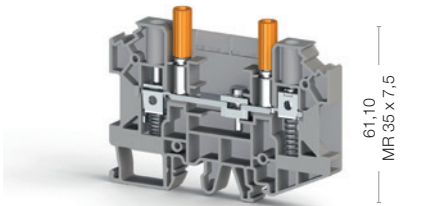


81,20

Cat No:

- 375 919
- 375 910

WGO YD 6

Width: 8 mm



81,20

Cat No:

- 375 929
- 375 920



Electrical Ratings
CE (EN 60947-7-1)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Connection Data
Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, (min.-max.)
AWG Conductor
Insulation Stripping Length (min.-max.)
Torque (min.-max.)
Screwdriver

End Plate

Grey
Beige

Cross Connection


Test Plug


Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

Package Quantity
48 pcs.

Voltage, V ~	Current, A	Cross-Section
1000	41	6 mm ²
1000	41	6 mm ²
500	36	0,5-10 mm ²

0,2-10 mm ²
0,2-10 mm ²
0,5-4 mm ²
AWG 24-8
10-12 mm
0,8-1,2 Nm
IKTD 4 (0,8x4,0)

Type	Order No	Qty.
NPP/WGO Y 6	450 279	25
NPP/WGO Y 6	450 270	25

Type	Order No	Qty.
IZUK 6/2	476 302	10
IZUK 6/3	476 303	10
IZUK 6/4	476 304	10
IZUK 6/6	476 306	10
IZUK 6/10	476 309	5
WGO UAA	498 300	1

Type	Order No	Qty.
TF (Q4)	493 050	10

6/3
1/B5
IP 20 / -
D-NS 8x10, DG 10/8, SLF-P1 W, KCSLF-W 11,2x100mm

48 pcs.

Voltage, V ~	Current, A	Cross-Section
1000	41	6 mm ²
1000	41	6 mm ²
500	36	0,5-10 mm ²

0,2-10 mm ²
0,2-10 mm ²
0,5-4 mm ²
AWG 24-8
10-12 mm
0,8-1,2 Nm
IKTD 4 (0,8x4,0)

Type	Order No	Qty.
NPP/WGO YD 6	450 279	25
NPP/WGO YD 6	450 270	25

Type	Order No	Qty.
IZUK 6/2	476 302	10
IZUK 6/3	476 303	10
IZUK 6/4	476 304	10
IZUK 6/6	476 306	10
IZUK 6/10	476 309	5
WGO UAA	498 300	1

Type	Order No	Qty.
TF (Q4)	493 050	10

6/3
1/B5
IP 20 / -
D-NS 8x10, DG 10/8, SLF-P1 W, KCSLF-W 11,2x100mm

48 pcs.
