


WGO PB Series Test / Disconnect Terminals

WGO PB 6/NM

Width: 11 mm

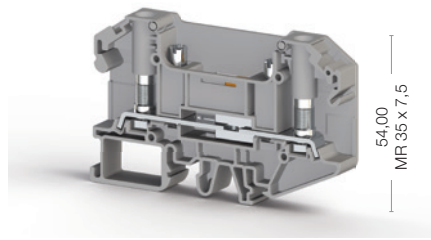


86,60

Cat No:

308 069
308 060

WGO PBD 6/NM

Width: 11 mm

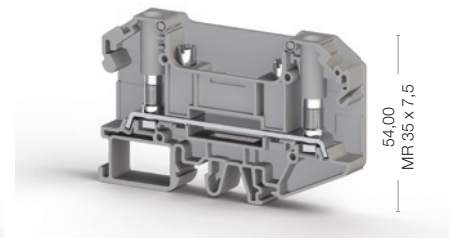

86,60

Cat No:

308 079
308 070



Electrical Ratings
CE (EN 60947-7-1)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Connection Data
Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
AWG Conductor
Torque
Hole Diameter
Bolt Diameter
Screwdriver

End Plate

Comb Connector/Ring Type

Test Plug

Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

Voltage, V ~	Current, A	Cross-Section
1000	41	6 mm²
600	45	AWG 22-8
1000	41	6 mm²
600	45	AWG 22-8
630	36	0,5-6 mm²

0,5-6 mm²
0,5-6 mm²
AWG 22-8
0,8-1,2 Nm
4,2 mm
4 mm
IKTD 5 (1,0x5,5)

Type	Order No	Qty.
NPP/WGO PB 6	451 009	25
APP/WGO PB 6	464 019	25

Type	Order No	Qty.
TKO PB 6/2	479 002	25
TKO PB 6/3	479 003	20
TKO PB 6/4	479 004	15
TKO PB 6/7	479 007	5
TKO PB 6/10	479 009	5

6/3
1/NA
IP 20 / -
D-NS 8x10, DG 10/8

25 pcs.

Voltage, V ~	Current, A	Cross-Section
1000	41	6 mm²
600	45	AWG 22-8
600	45	AWG 22-8

0,5-6 mm²
0,5-6 mm²
AWG 22-8
0,8-1,2 Nm
4,2 mm
4 mm
IKTD 5 (1,0x5,5)

Type	Order No	Qty.
NPP/WGO PB 6	451 009	25
APP/WGO PB 6	464 019	25

Type	Order No	Qty.
TKO PB 6/2	479 002	25
TKO PB 6/3	479 003	20
TKO PB 6/4	479 004	15
TKO PB 6/7	479 007	5
TKO PB 6/10	479 009	5

8/3
1/NA
IP 20 / -
D-NS 8x10, DG 10/8

25 pcs.
