


Matica trapezoidna tipa FFR – s prirubnicom od bronz

Materijal: EN 1982 Cu Sn5 Zn5 Pb5-C – CC491K

Matica s prirubnicom od bronz posebno prilagodjena kontinuiranim kretanjima, sa dobrom otpornošću na habanje .
Preporučuje se dobro podmazivanje.

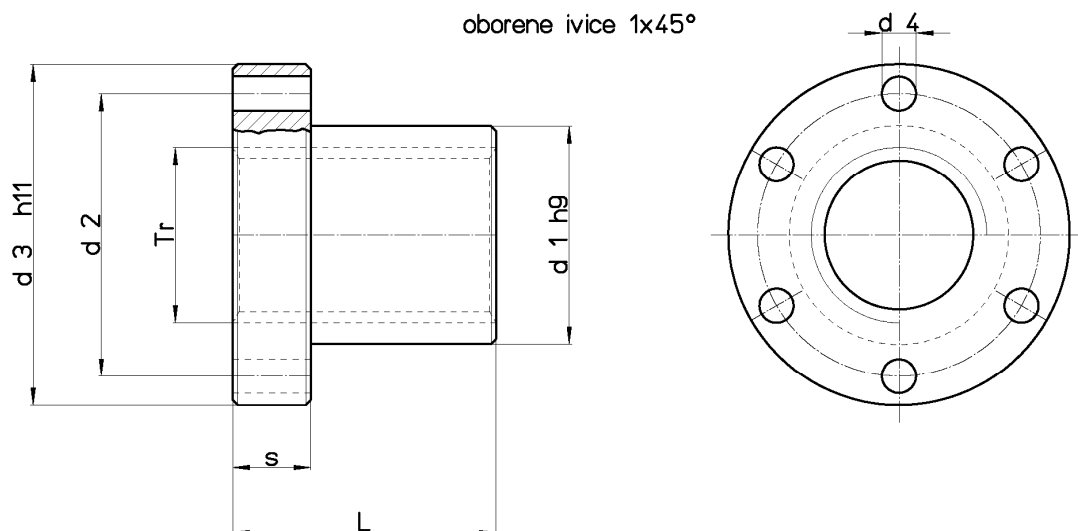

Šifra za maticu DESNI	Šifra za maticu LIJEVI	Prečnik po koraku	br. početaka	d1 mm	d2 mm	d3 mm	d4 mm	L mm	S mm	br. rupa za vijke	Vijci na fiksiranje (klasa 8.8)	Težina kg/mt	At mm ² (1)
FFR 10 T R	FFR 10 T L	Tr 10x2	1	25	34	42	5	25	10	6	M4	0,164	250
FFR 10 J R	--	Tr 10x4 (P2)	2	25	34	42	5	25	10	6	M4	0,164	250
FFR 12 A R	FFR 12 A L	Tr 12x3	1	28	38	48	6	35	12	6	M5	0,276	400
FFR 12 B R	--	Tr 12x6 (P3)	2	28	38	48	6	35	12	6	M5	0,276	400
FFR 14 R R	FFR 14 R L	Tr 14x3	1	28	38	48	6	35	12	6	M5	0,272	460
FFR 14 B R	--	Tr 14x6 (P3)	2	28	38	48	6	35	12	6	M5	0,272	460
FFR 16 A R	FFR 16 A L	Tr 16x4	1	28	38	48	6	35	12	6	M5	0,260	530
FFR 16 B R	--	Tr 16x8 (P4)	2	28	38	48	6	35	12	6	M5	0,260	530
FFR 18 A R	FFR 18 A L	Tr 18x4	1	28	38	48	6	35	12	6	M5	0,247	610
FFR 18 B R	--	Tr 18x8 (P4)	2	28	38	48	6	35	12	6	M5	0,247	610
FFR 20 A R	FFR 20 A L	Tr 20x4	1	32	45	55	6.5	44	12	6	M6	0,370	870
FFR 20 B R	--	Tr 20x8 (P4)	2	32	45	55	6.5	44	12	6	M6	0,370	870
FFR 22 A R	FFR 22 A L	Tr 22x5	1	32	45	55	6.5	44	12	6	M6	0,360	1030
FFR 22 B R	--	Tr 22x10 (P5)	2	32	45	55	6.5	44	12	6	M6	0,360	1030
FFR 24 A R	FFR 24 A L	Tr 24x5	1	32	45	55	6.5	44	12	6	M6	0,337	1040
FFR 24 B R	--	Tr 24x10 (P5)	2	32	45	55	6.5	44	12	6	M6	0,337	1040
FFR 26 A R	FFR 26 A L	Tr 26x5	1	38	50	62	6.5	46	14	6	M6	0,516	1280
FFR 26 B R	--	Tr 26x10 (P5)	2	38	50	62	6.5	46	14	6	M6	0,516	1280
FFR 28 A R	FFR 28 A L	Tr 28x5	1	38	50	62	6.5	46	14	6	M6	0,472	1200
FFR 28 B R	--	Tr 28x10 (P5)	2	38	50	62	6.5	46	14	6	M6	0,472	1200
FFR 30 A R	FFR 30 A L	Tr 30x6	1	38	50	62	6.5	46	14	6	M6	0,421	1370
FFR 30 B R	--	Tr 30x12 (P6)	2	38	50	62	6.5	46	14	6	M6	0,421	1370
FFR 32 A R	FFR 32 A L	Tr 32x6	1	45	58	70	6.5	54	16	6	M6	0,779	1710
FFR 32 B R	--	Tr 32x12 (P6)	2	45	58	70	6.5	54	16	6	M6	0,779	1710
FFR 36 A R	FFR 36 A L	Tr 36x6	1	45	58	70	6.5	54	16	6	M6	0,694	1950
FFR 36 B R	--	Tr 36x12 (P6)	2	45	58	70	6.5	54	16	6	M6	0,694	1950
FFR 40 A R	FFR 40 A L	Tr 40x7	1	63	78	95	8.5	66	16	6	M8	1,788	2650
FFR 40 B R	--	Tr 40x14 (P7)	2	63	78	95	8.5	66	16	6	M8	1,788	2650
FFR 44 A R	FFR 44 A L	Tr 44x7	1	63	78	95	8.5	66	16	6	M8	1,657	2940
FFR 50 A R	FFR 50 A L	Tr 50x8	1	72	90	110	10.5	75	18	6	M10	2,500	4540
FFR 60 A R	FFR 60 A L	Tr 60x9	1	88	110	130	12.5	90	20	6	M12	4,260	5490
FFR 70 A R	FFR 70 A L	Tr 70x10	1	95	120	140	12.5	105	22	6	M12	5,303	7500
FFR 80 A R	FFR 80 A L	Tr 80x10	1	105	130	150	12.5	120	24	6	M12	6,094	9710

(1) Ukupna površina prilijeganja između zubi vijka i zubi matice u ravni okomitaj na osu.

Zadržavamo si pravo na izmjenjene dimenzije i karakteristika bez prethodne najave.