



4. PVC Wiring Ducts Product Range

4.1 PVC Wiring Duct with Additional Holes KKD Series

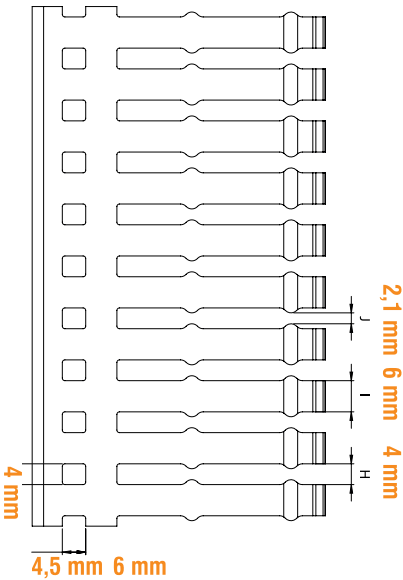


Order No	Product	Size WxH (mm)	Color	Qty.
555 2530	KKD 2530	25x30	Grey ●	50x2 m
555 2540	KKD 2540	25x40	Grey ●	50x2 m
555 2560	KKD 2560	25x60	Grey ●	30x2 m
555 2580	KKD 2580	25x80	Grey ●	28x2 m
555 2510	KKD 2510	25x100	Grey ●	22x2 m
555 4040	KKD 4040	40x40	Grey ●	26x2 m
555 4060	KKD 4060	40x60	Grey ●	18x2 m
555 4080	KKD 4080	40x80	Grey ●	20x2 m
555 4010	KKD 4010	40x100	Grey ●	14x2 m
555 6040	KKD 6040	60x40	Grey ●	18x2 m
555 6060	KKD 6060	60x60	Grey ●	12x2 m
555 6080	KKD 6080	60x80	Grey ●	12x2 m
555 6010	KKD 6010	60x100	Grey ●	18x2 m
555 8040	KKD 8040	80x40	Grey ●	18x2 m
555 8060	KKD 8060	80x60	Grey ●	14x2 m
555 8080	KKD 8080	80x80	Grey ●	10x2 m
555 8010	KKD 8010	80x100	Grey ●	12x2 m
555 1006	KKD 1006	100x60	Grey ●	10x2 m
555 1008	KKD 1008	100x80	Grey ●	8x2 m
555 1001	KKD 1001	100x100	Grey ●	12x2 m
555 1206	KKD 1206	120x60	Grey ●	8x2 m
555 1208	KKD 1208	120x80	Grey ●	6x2 m
555 1201	KKD 1201	120x100	Grey ●	10x2 m

- Can be used with cable tie thanks to additional holes on the sides.
- Flame-retardant, self-extinguishing according to UL94-V0
- Upper scorline is available for breaking off the ribs.
- Lower scorline is available.
- **Operating Temperature:** -5°C to 60°C
- **Standard Length:** 2 meters
- **Color Option:** RAL 7030 Grey
- Complies with RoHS regulations.
- Complies with IEC 60695-2-1 and EN 50085-2-3 standards.



* Wiring duct covers are included the package.

4. PVC Wiring Ducts Product Range

4.2 PVC Wiring Duct with Additional Holes (Wide Slotted) — KKD Series

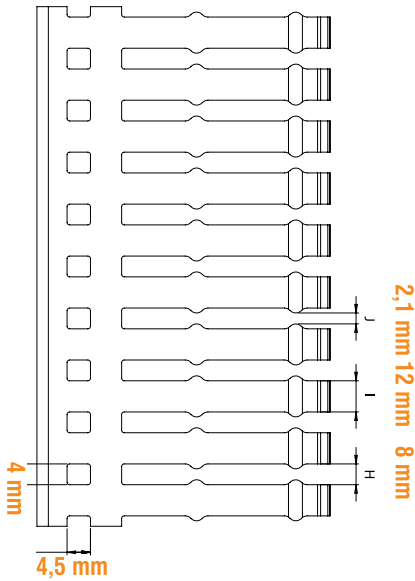

Order No	Product	Size WxH (mm)	Color	Qty.
555 4060WS	KKD 4060	40x60	Grey ●	50x2 m
555 4080WS	KKD 4080	40x80	Grey ●	50x2 m
555 4010WS	KKD 4010	40x100	Grey ●	30x2 m
555 6060WS	KKD 6060	60x60	Grey ●	28x2 m
555 6080WS	KKD 6080	60x80	Grey ●	22x2 m
555 6010WS	KKD 6010	60x100	Grey ●	26x2 m
555 8060WS	KKD 8060	80x60	Grey ●	18x2 m
555 8080WS	KKD 8080	80x80	Grey ●	20x2 m
555 8010WS	KKD 8010	80x100	Grey ●	14x2 m
555 1006WS	KKD 1006	100x60	Grey ●	18x2 m
555 1008WS	KKD 1008	100x80	Grey ●	12x2 m
555 1001WS	KKD 1001	100x100	Grey ●	12x2 m
555 1206WS	KKD 1206	120x60	Grey ●	18x2 m
555 1208WS	KKD 1208	120x80	Grey ●	18x2 m
555 1201WS	KKD 1201	120x100	Grey ●	14x2 m
555 1501WS	KKD 1501	150x100	Grey ●	10x2 m

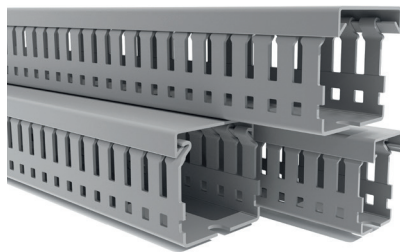

- Can be used with cable tie thanks to additional holes on the sides.
- Flame-retardant, self-extinguishing according to UL94-V0
- Upper scorline is available for breaking off the ribs.
- Lower scorline is available.
- **Operating Temperature:** -5°C to 60°C
- **Standard Length:** 2 meters
- **Color Option:** RAL 7030 Grey
- Complies with RoHS regulations.
- Complies with IEC 60695-2-1 and EN 50085-2-3 standards.

* Wiring duct covers are included the package.

