

|      |           |    |    |     |     |     |
|------|-----------|----|----|-----|-----|-----|
| YK 2 | 541 280 S | 28 | 28 | 6,5 | 5,8 | 500 |
|------|-----------|----|----|-----|-----|-----|


## Saddle Type Tie Mounts

**Material :** UL Approved Polyamide 66, UL 94V-2.

Saddle design provides maximum stability to wire bundles. To apply, simply fix mount with a screw and secure wire bundles with the cable ties.

**To apply with the cable ties :**

VK 1 : Up to 5 mm. wide cable ties.

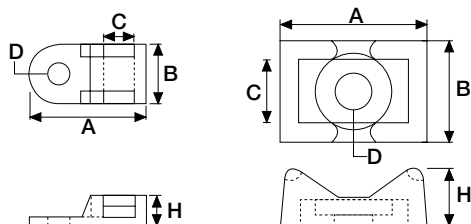

| Type | Cat. No.  | Dimensions (mm) |     |   |     |   | Qty. |
|------|-----------|-----------------|-----|---|-----|---|------|
|      |           | A               | B   | H | D Ø | C |      |
| VK 1 | 542 110 B | 19              | 9,5 | 5 | 3,4 | 5 | 500  |
| VK 1 | 542 110 S | 19              | 9,5 | 5 | 3,4 | 5 | 500  |
| VK 2 | 542 120 B | 23              | 16  | 9 | 6   | 9 | 500  |
| VK 2 | 542 120 S | 23              | 16  | 9 | 6   | 9 | 500  |