

3.2.9.3 CGW

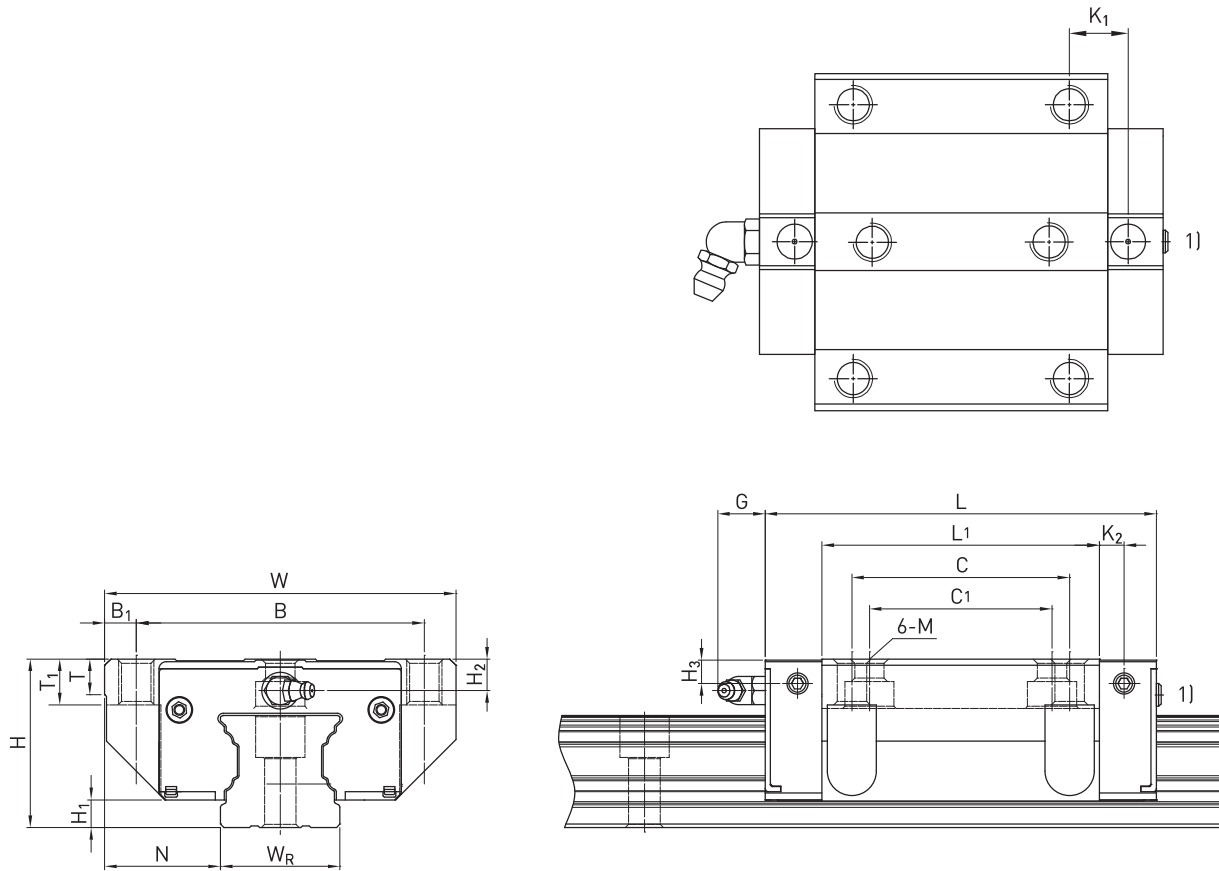


Table 3.26 Dimensions of the block

Series/size	Installation dimensions [mm]			Dimensions of the block [mm]															Load ratings [N]		Weight [kg]
	H	H ₁	N	W	B	B ₁	C	C ₁	L ₁	L	K ₁	K ₂	G	M	T	T ₁	H ₂	H ₃	C _{dyn}	C ₀	
CGW15CC	24	4.1	16.0	47	38	4.5	30	26	39.6	58.2	8.8	4.25	6.0	M5	6.0	6.5	3.8	3.8	14,700	23,470	0.14
CGW20CC	30	4.6	21.5	63	53	5.0	40	35	52.5	74.9	10.45	5.50	6.0	M6	6.5	7.7	3.7	3.5	27,100	36,680	0.36
CGW20HC									68.5	90.9	18.45								32,700	47,960	0.47
CGW25CC	36	6.1	23.5	70	57	6.5	45	40	61.0	84.0	12.4	5.00	12.0	M8	7.0	9.3	6.0	5.5	34,900	52,820	0.53
CGW25HC									78.4	101.4	21.1								42,200	69,070	0.68
CGW30CC	42	7.0	31.0	90	72	9.0	52	44	69.0	97.4	13.75	8.70	12.0	M10	10.5	12.0	6.7	7.0	48,500	71,870	0.90
CGW30HC									91.5	119.9	25.0								58,600	93,990	1.19
CGW35CC	48	7.6	33.0	100	82	9.0	62	52	79.0	111.4	16.6	7.00	12.0	M10	10.1	13.1	9.0	7.0	64,600	93,990	1.37
CGW35HC									103.4	135.8	28.8								77,900	122,770	1.79
CGW45CC	60	9.7	37.5	120	100	10.0	80	60	97.2	137.6	13.0	8.70	12.9	M12	15.1	15.0	8.5	8.1	103,800	146,710	2.45
CGW45HC									133.6	174.0	31.2								125,300	191,850	3.00

For dimensions of the rail, see Page 60, for standard as well as optional lubrication adapter, see Page 152.

¹⁾ Flat head screw protrudes 1 mm in all sizes.