

Spring-Loaded Catches • DIN 6310 catches with spring EH 22200.




PRODUCT DESCRIPTION

The catches with spring, manufactured according to DIN 6310, are used as locking elements, for example.

Material

- Heat-treated steel, blackened. Hardened where shown by ___ line.

DRAWING

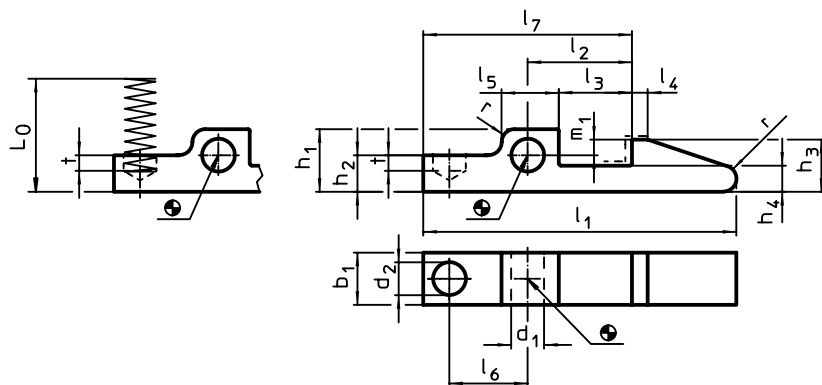

Hardened where shown by ___ line.

ORDER INFORMATION

I ₁	b ₁ -0.2	d ₁ E9	d ₂	h ₁	h ₂	h ₃	h ₄	Dimensions										Spring rate R ~ [N/mm]		Art. No.
								I ₂ ±0.1	I ₃	I ₄	I ₅	I ₆	I ₇	m ₁	t	r	L ₀ ~			
								[mm]												
45	8	4	5.0	9.5	5.5	8	4	15	10	2	9	11	30	2.5	1.5	1.6	17.8	3.0	15	22200.0045
60	10	5	6.3	12.0	7.0	10	5	20	14	3	11	15	40	3.0	3.0	2.5	21.2	4.0	35	22200.0060
80	14	6	8.0	15.0	9.0	14	7	30	22	5	14	23	60	5.0	5.0	4.0	25.1	4.8	80	22200.0080

APPLICATION EXAMPLE

