

Door Catches
EH 22260.

2




PRODUCT DESCRIPTION

Material
■ Sintered steel

Assembly
Not suitable for fastening by welded connection. Secure by using pins.


DRAWING

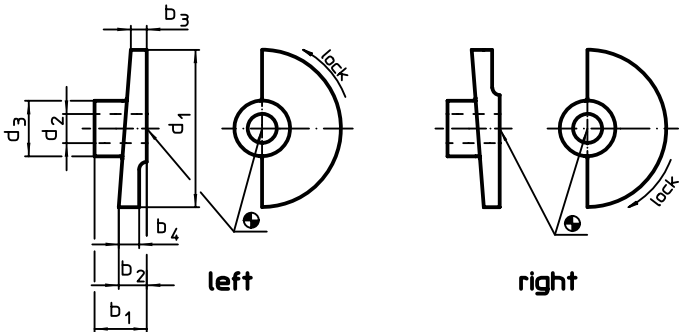

ORDER INFORMATION

Dimensions								Art. No.
d ₁	d ₂ H8	d ₃	b ₁	b ₂	b ₃	b ₄		
[mm]							[g]	
locking by turning to the right								
35	8	18	15	7	3	7.0	33	22260.0008
	10	18	15	7	3	7.0	31	22260.0010
65	12	23	20	10	5	7.2	103	22260.0012
80	16	27	24	12	6	8.8	174	22260.0016
locking by turning to the left								
35	8	18	15	7	3	7.0	34	22260.0108
	10	18	15	7	3	7.0	31	22260.0110
65	12	23	20	10	5	7.2	103	22260.0112
80	16	27	24	12	6	8.8	175	22260.0116

APPLICATION EXAMPLE

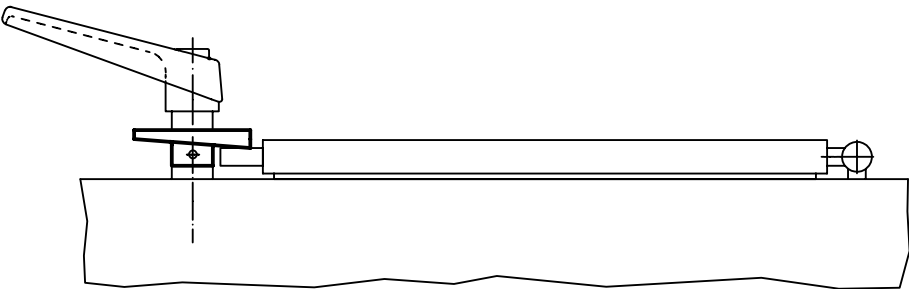

Clamping Catches

EH 22260.

2



PRODUCT DESCRIPTION

Clamping catches have a round running taper surface and enable fast and safe clamping and releasing with a relatively large adjustment range and high tensioning force. Due to the small gradient angle of the taper surface, the clamping catch is self-locking.

Material

Body

- Steel, case-hardened, blackened
- Stainless steel 1.4305, nickel-plated

Screw

- Steel, nitrided
- Stainless steel 1.4021, heat-treated, nickel-plated

Gear lever handle

- Steel, ground, blackened
- Stainless steel 1.4305, dull blasted

Ball knob

- Thermosetting plastic PF 31, black, DIN 319

Assembly

Fix with screw bolt M 10 (WS 6). Ensure a tightening torque of max. 40 Nm.

Operation


The screw bolt and the washer are adjustable. Once screwed in, the clamping catch can easily be turned to the desired position. For Art. No. 22260.0250 / .0251 and 22260.0450 / .0451, the serration helps to put the tension lever to the preferred position.

MORE INFORMATION

Notes

Left turn type can be supplied on request.

DRAWING

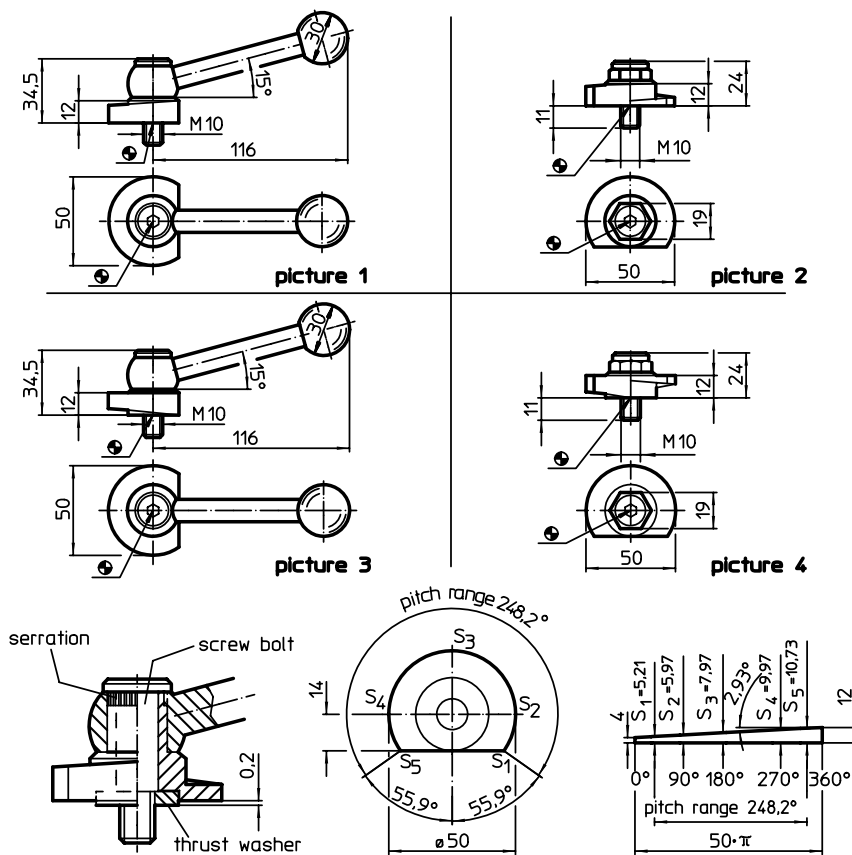

ORDER INFORMATION

Tightening torque max.		Art. No.	
		Steel	Stainless steel
[Nm]	[g]		
with adjustable tension lever, pitch opposite to bearing surface – picture 1			
40	304	22260.0250	22260.0251
with clamping screw, pitch opposite to bearing surface – picture 2			
40	154	22260.0350	22260.0351
with adjustable tension lever, pitch on bearing surface – picture 3			
40	312	22260.0450	22260.0451
with clamping screw, pitch on bearing surface – picture 4			
40	154	22260.0550	22260.0551