

Thrust Pads • DIN 6311 and low model

EH 22560.

2



PRODUCT DESCRIPTION

Combinable with grub screws DIN 6332 with thrust point EH 22540.

Material

- Steel, case-hardened, blackened. Snap ring inlaid.
- Stainless steel

Assembly

The thrust pad is to be held the way the spring retainer lies in the recess with its


open side at the bottom. The grub screw is inclined as far as possible in the direction of the open side of the ring and pressed in.

MORE INFORMATION


Further products

Grub Screws, DIN 6332 with thrust point. → p. 280

DRAWING

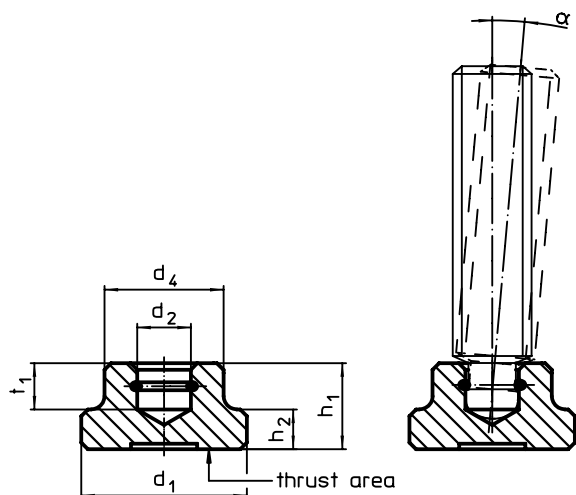

picture 1

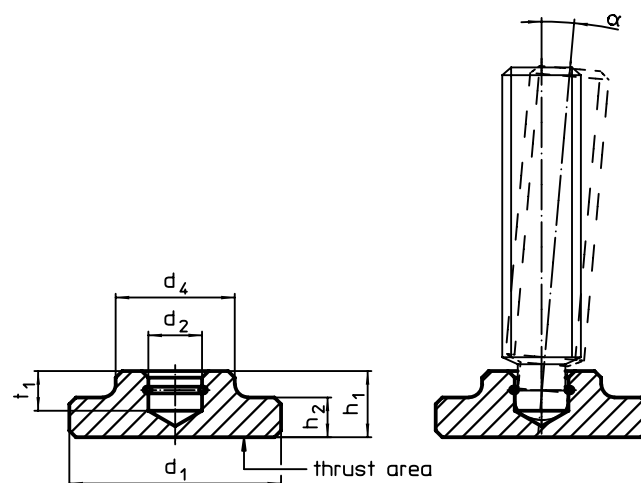

picture 2

ORDER INFORMATION

d ₁	d ₂ H12	Dimensions				For grub screws with thrust point DIN 6332	α min.		Art. No.	
		d ₄	h ₁	h ₂	t ₁				Steel	Stainless steel
		[mm]							[mm]	[g]
DIN 6311 with snap ring, form S – picture 1										
12	4.6	10	7	2.5	4.0	M 6	7°	4.3	22560.0012	22560.0112
16	6.1	12	9	4.0	5.0	M 8	4°	9.4	22560.0016	22560.0116
20	8.1	15	11	5.0	6.0	M10	3°	18.0	22560.0020	22560.0120
25	8.1	18	13	6.0	7.0	M12	3°	33.0	22560.0025	22560.0125
32	12.1	22	15	7.0	7.5	M16	5°	58.0	22560.0032	22560.0132
40	15.6	28	16	9.0	8.0	M20	4°	105.0	22560.0040	22560.0140
low model, with increased thrust area and spring retainer – picture 2										
25	6.1	12	8	4.0	4.5	M 8	4°	18.0	22560.0425	22560.1425
32	8.1	18	10	6.0	6.0	M10/M12	3°	43.0	22560.0432	22560.1432
40	12.1	22	12	7.0	7.0	M16	5°	75.0	22560.0440	22560.1440

APPLICATION EXAMPLE

