

Clamps • DIN 6316 with goose-neck

EH 23160.




PRODUCT DESCRIPTION

This clamp (clamping claw) according to DIN 6316 with goose-neck is mainly used in mechanical clamping technology for clamping workpieces.

Material

- Heat-treated steel, varnished

DRAWING

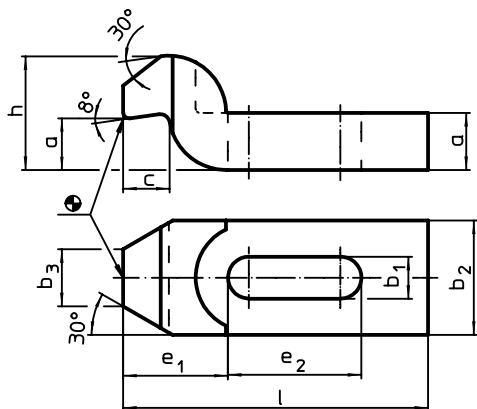


ORDER INFORMATION

Nominal dimension b_1 [mm]	Dimensions								For screws			Art. No.
	l	a	b_2	b_3	c	e_1	e_2	h	[mm]	[in]	[g]	
6.6	60	10	20	10	8	20	20	20	M 6	1/4	81	23160.0007
9.0	80	12	25	12	9	25	25	24	M 8	5/16	165	23160.0009
11.0	100	15	30	15	12	32	32	30	M10	3/8	307	23160.0011
14.0	125	20	40	20	16	40	40	40	M12, M14	1/2	680	23160.0014
18.0	125	25	50	25	20	49	40	50	M16, M18	5/8	1059	23160.0018¹⁾
	160	25	50	25	20	49	50	50	M16, M18	5/8	1356	23160.0019
22.0	160	30	60	30	24	55	55	60	M20	3/4	1937	23160.0022¹⁾
	200	30	60	30	24	55	70	60	M20	3/4	2100	23160.0023
26.0	200	35	70	35	28	72	60	70	M24	1	3364	23160.0026¹⁾
	250	35	70	35	28	72	80	70	M24	1	4115	23160.0027
33.0	250	40	80	40	40	91	80	80	M30	1 1/4	4500	23160.0034¹⁾
	315	50	80	40	40	91	100	100	M30	1 1/4	8340	23160.0035

¹⁾ DIN standards do not include these dimensions.

APPLICATION EXAMPLE

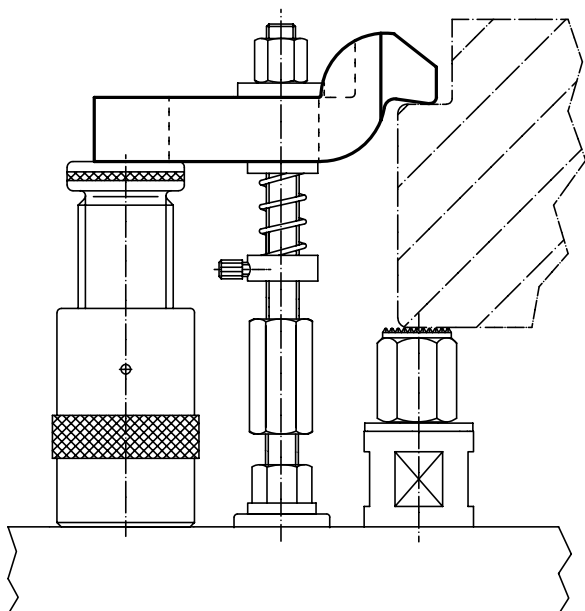




PRODUCT DESCRIPTION

This clamp (clamping claw) according to DIN 6314 B is stepped and is mainly used in mechanical clamping technology for clamping workpieces.

Material

- Heat-treated steel, tempered, blackened

DRAWING

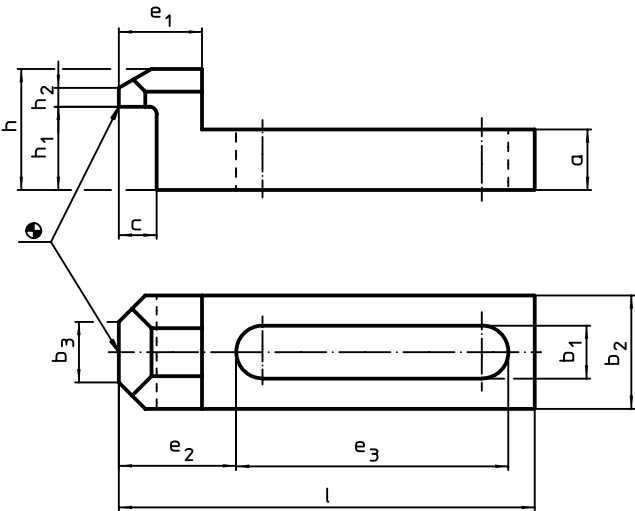

ORDER INFORMATION

Nominal dimension b ₁	Dimensions											For screws			Art. No.
	l	a	b ₂	b ₃	c	e ₁	e ₂	e ₃	h	h ₁	h ₂				
	[mm]	[mm]											[mm]	[in]	
6.6	55	8	15	8	5	11	15.5	36	16	11	2	M 6	1/4	39	23160.0107
9.0	70	10	20	10	8	15	19.5	46	20	14	3	M 8	5/16	80	23160.0109
11.0	90	13	25	12	10	19	26.5	58	25	18	4	M10	3/8	168	23160.0111
13.0	115	16	30	15	12	24	32.5	75	32	23	5	M12	1/2	325	23160.0113
17.0	145	20	40	20	14	29	38.5	99	40	28	6	M16	5/8	685	23160.0117

APPLICATION EXAMPLE

