

Clamping Devices Actima

EH 23260.



PRODUCT DESCRIPTION

The compact clamping element can be converted between pull and push clamping strain, depending on the model. The travel path is 10 mm. Within the short clamp travel of 2 mm, self-locking occurs in any position. The maximum permitted clamping force is 4.9 kN.

Material

Housing

- Thermoplastic, black

Body

- Steel, blackened


Ball knob

- DIN 7708 - thermosetting plastic (PF 31), red similar to RAL 3003

Accessories

- Steel, blackened

DRAWING

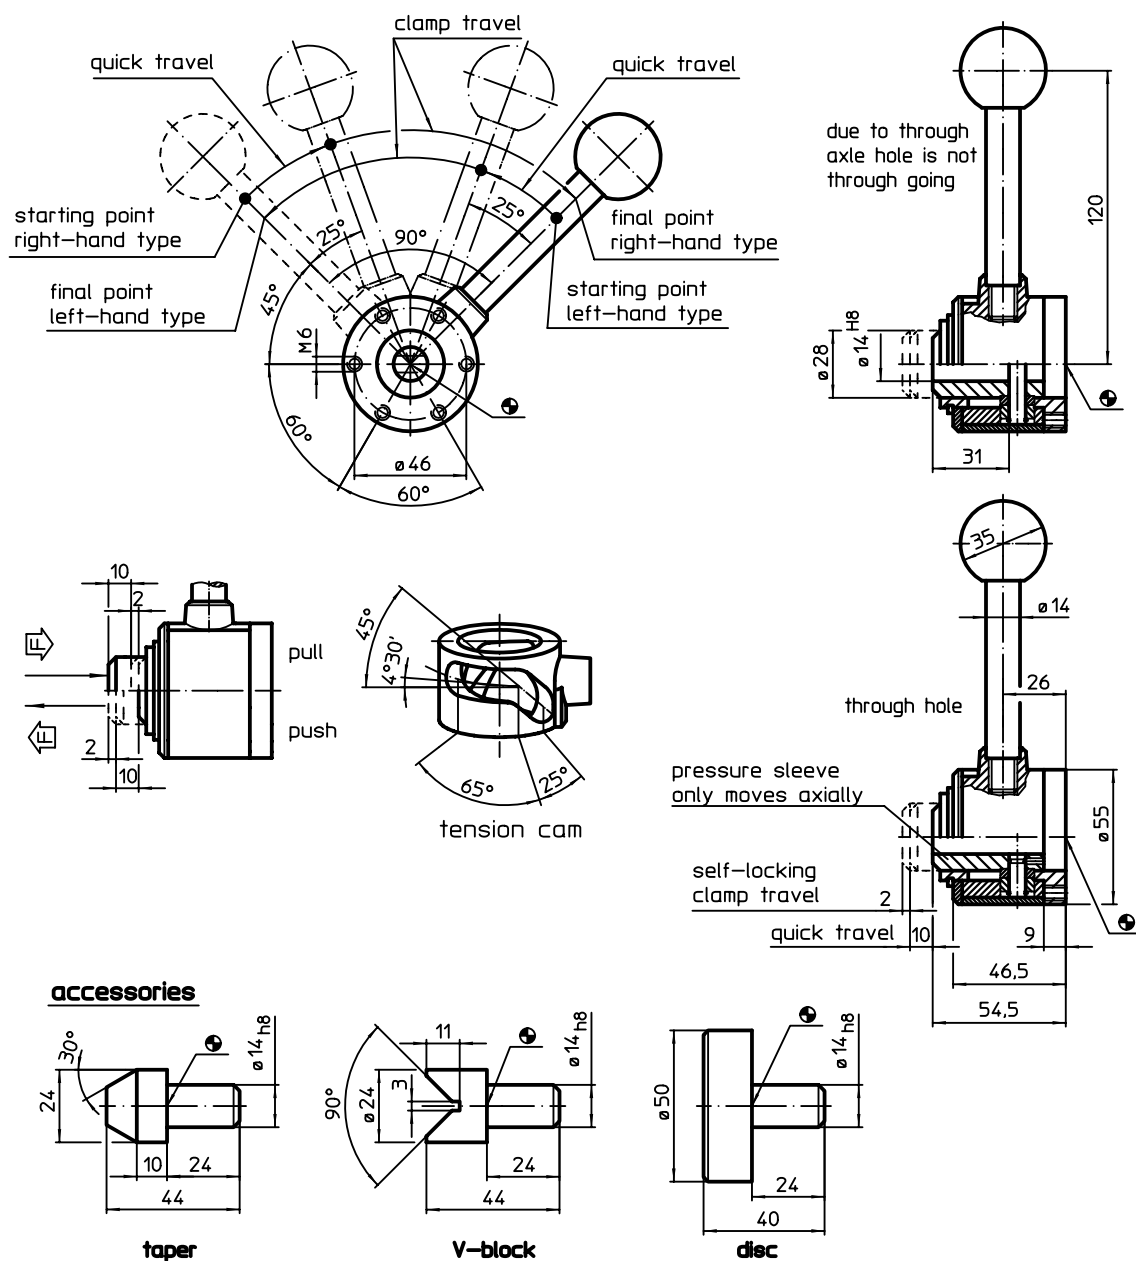

ORDER INFORMATION

Travel path	s Clamping way	Clamping force max.		Art. No.	
				with transverse axis in the bore	with throughgoing bore
[mm]	[mm]	[kN]	[g]		
pull to right					
10	2	4.9	751	23260.0003	23260.0013
pull to left					
10	2	4.9	749	23260.0005	23260.0015
push to right					
10	2	4.9	751	23260.0002	23260.0012
push to left					
10	2	4.9	749	23260.0004	23260.0014

ACCESSORIES

	 [g]	Art. No.
disc		
	270	23260.0042
taper		
	85	23260.0044
V-block		
	82	23260.0046

APPLICATION EXAMPLE

