

Eccentric Clamps

EH 23410.



PRODUCT DESCRIPTION

Eccentric clamps enable fast and safe clamping and releasing with a relatively large adjustment range and high tensioning force. The eccentric plain washer enables a stepless radial clamping effect in any clamping position. Furthermore, the eccentric clamp is self-locking. The clamp can be used as a stepless stop by removing the thrust washer.

Material

Gear lever handle

- Steel, ground, blackened
- Stainless steel 1.4305, dull blasted

Body

- Steel, case-hardened, blackened
- Stainless steel 1.4305, nickel-plated

Screw

- Steel, hardened, blackened
- Stainless steel 1.4021, heat-treated, nickel-plated

Ball knob

- Thermosetting plastic PF 31, black, DIN 319

Assembly

Fix with screw bolt M 10 (WS 6). Ensure a tightening torque of max. 40 Nm.

Operation


The screw bolt and the washer are adjustable. Once screwed in, the clamping catch can easily be turned to the desired position. For Art. No. 23410.0050 / .0051, the serration helps to put the tension lever to the preferred position.

MORE INFORMATION


Notes

Left turn type can be supplied on request.




DRAWING

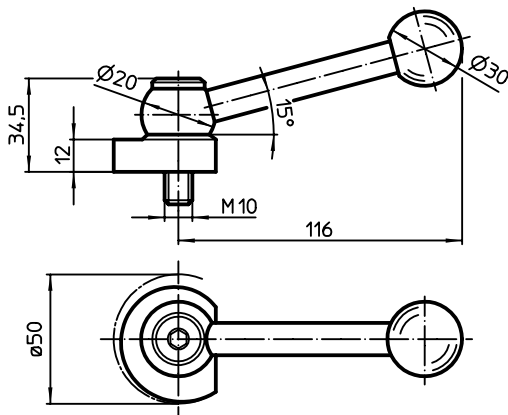

picture 1

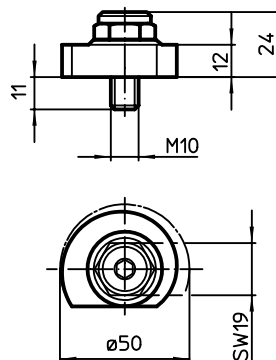

picture 2

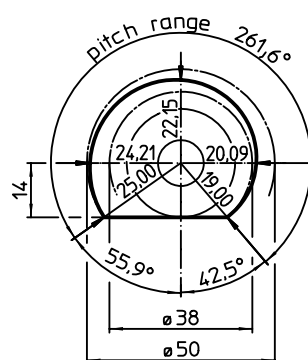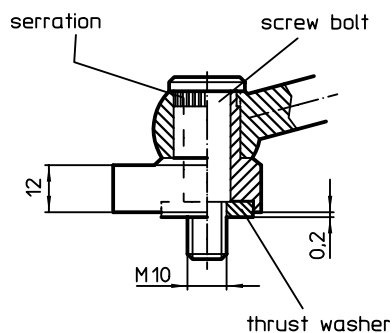

ORDER INFORMATION

	Art. No.	
	Steel	Stainless steel
[g]		
with tension lever – picture 1		
317	23410.0050	23410.0051
with clamping screw – picture 2		
159	23410.0150	23410.0151

Eccentric Clamping Modules • with shaft location

EH 23410.



PRODUCT DESCRIPTION

The clamping effect remains unchanged and is self-locking in any angle position.

Material

- Sintered steel, case-hardened

Further products


Gear Lever Handles → p. 597

MORE INFORMATION

References

Possible applications in combination with e.g. gear lever handles EH 24350.

DRAWING

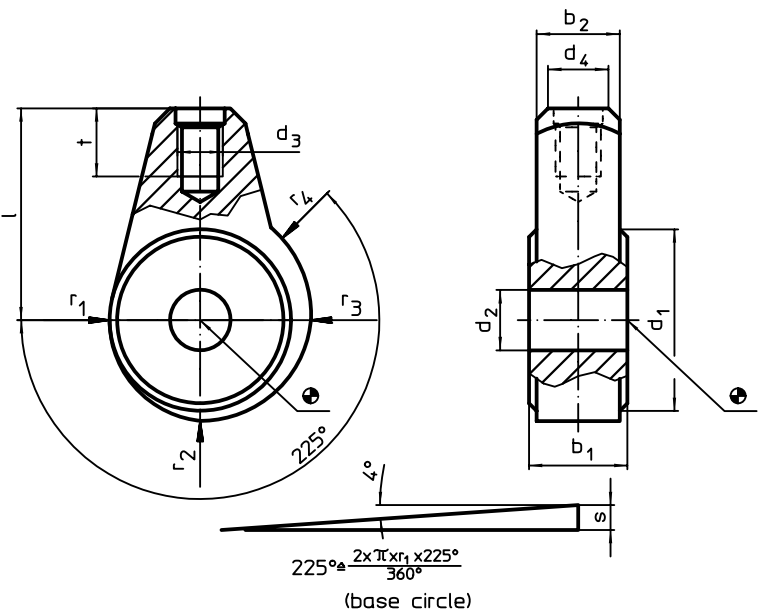

ORDER INFORMATION

Dimensions												d ₄ Gear lever handle Ø EH 24350.		Art. No.
d ₁	d ₂ H9	b ₁ -0.05 -0.15	b ₂	d ₃	l	r ₁	r ₂	r ₃	r ₄	s	t			
[mm]												[mm]	[g]	
24	8	13	11	M 6	28	12.0	13.32	14.64	15.30	3.3	9	8	50	23410.0210
30	10	15	13	M 8	32	15.0	16.65	18.30	19.12	4.1	12	10	100	23410.0220
35	12	17	15	M10	36	17.5	19.42	21.34	22.31	4.8	15	12	150	23410.0230

APPLICATION EXAMPLE

