

Retaining Latches • one-sided
EH 24100.



PRODUCT DESCRIPTION

To be used for door locking, drawers and as handling aid etc.
The retaining catch is indexing 4 x 90°.

Material

Lever

- Zinc die-cast, silver, similar to RAL 9006
- Zinc die-cast, black, similar to RAL 9005


Inner parts

- Dry powdered metal

Screw

- Stainless steel A2 (ISO 10642)


DRAWING

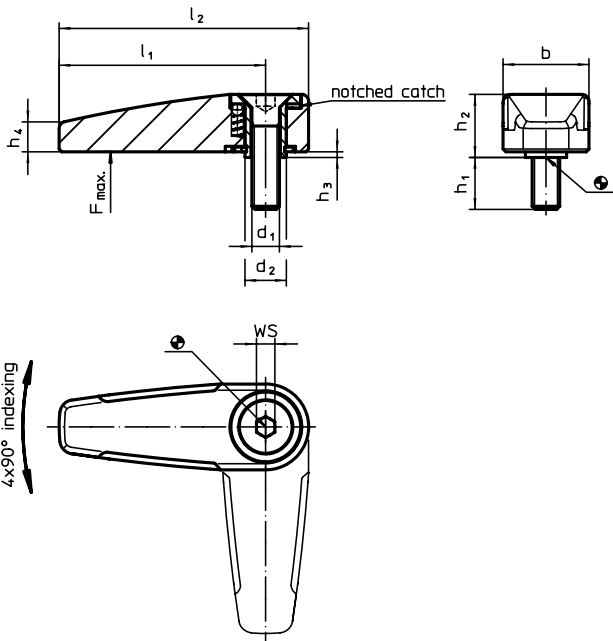

ORDER INFORMATION

Dimensions									WS	Load capacity max.		Art. No.	
d ₁	d ₂	l ₁	l ₂	b	h ₁	h ₂	h ₃	h ₄				silver	black
[mm]									[mm]	[N]	[g]		
M6	9	45	55	19.0	12	13.3	0.8	6.5	4	500	60	24100.0101	24100.0102
M8	14	65	78	25.2	14	15.8	0.8	9.0	5	1000	136	24100.0151	24100.0152

APPLICATION EXAMPLE

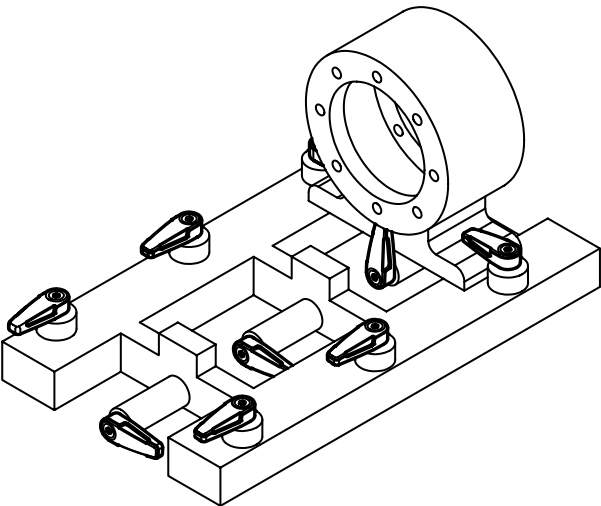

Retaining Latches • double-sided
EH 24100.



PRODUCT DESCRIPTION

To be used for door locking, drawers and as handling aid etc.
The retaining catch is indexing 4 x 90°.

Material

Lever

- Zinc die-cast, silver, similar to RAL 9006
- Zinc die-cast, black, similar to RAL 9005


Inner parts

- Dry powdered metal

Screw

- Stainless steel A2 (ISO 10642)

DRAWING

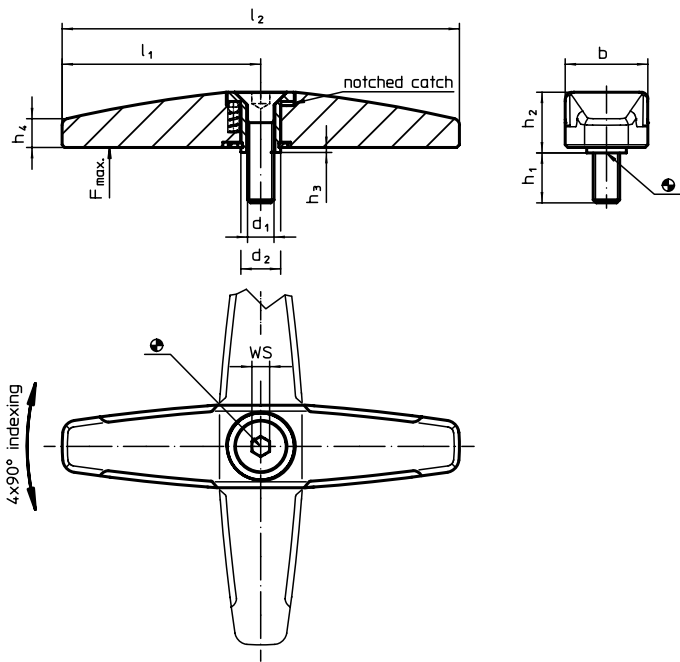

ORDER INFORMATION

Dimensions									WS	Load capacity max.		Art. No.	
d_1	d_2	l_1	l_2	b	h_1	h_2	h_3	h_4				silver	black
[mm]									[mm]	[N]	[g]		
M6	9	45	90	19.0	12	13.3	0.8	6.5	4	500	94	24100.0601	24100.0602
M8	14	65	130	25.2	14	15.8	0.8	9.0	5	1000	225	24100.0651	24100.0652

APPLICATION EXAMPLE

