


> LTF44

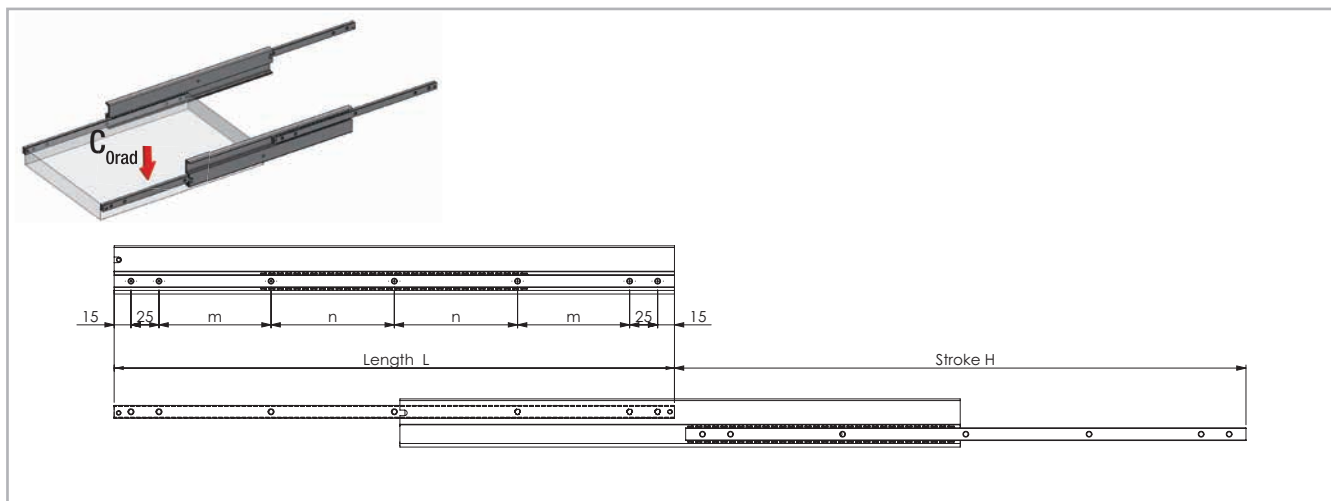


All dimensions are indicated in mm

Fig. 51

Type	Size	Length	Stroke	Load capacity per pair	Fixed and moving rails		Number of holes
		L [mm]	H [mm]	C_{Orad} [N]	m [mm]	n [mm]	
LTF	44	200	210	228	60	-	5
		225	235	260	72.5		
		250	260	288	85		
		275	285	324	97.5		
		300	310	360	110		
		325	335	392	122.5		
		350	360	420	135		
		375	385	452	147.5		
		400	410	492	160		
		425	435	524	172.5		
		450	460	552	185		
		500	510	624	100	110	7
		550	560	684		135	
		600	610	768		160	
		650	660	816		185	
		700	710	888	150	160	
		750	760	948		185	
		800	810	1020		210	
		850	860	1080		235	
		900	910	1152		260	
		950	960	1224		285	
		1000	1010	1296		310	

Tab. 32

> LTF44

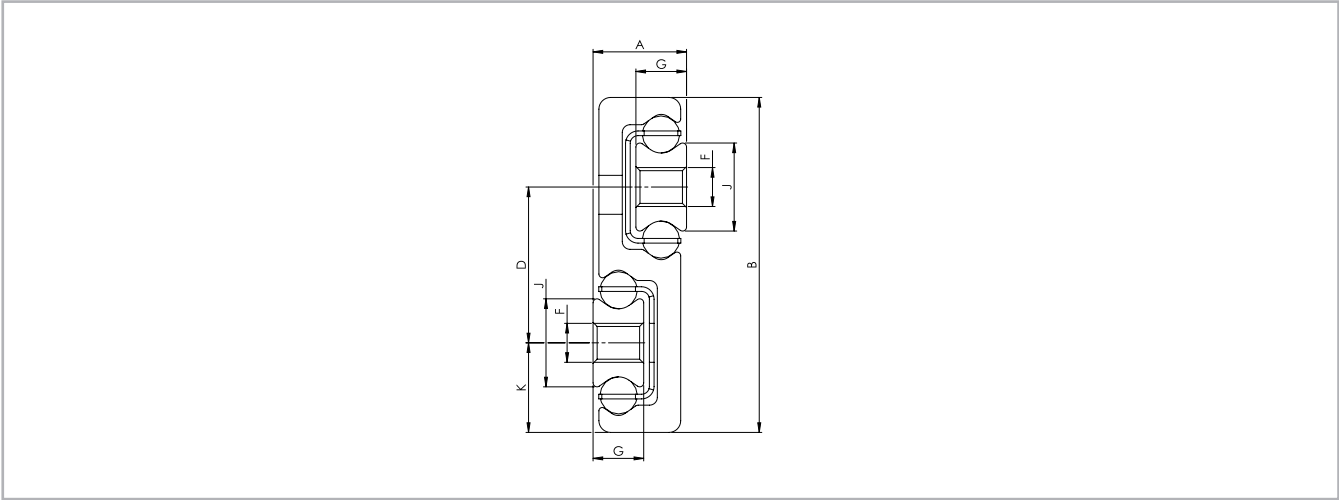

All dimensions are indicated in mm

Fig. 52

Type	Size	A	B	J	G	K	D	F	Weight per single guide [kg/m]
LTF44	44	12	43	11.3	6.5	11.5	20	M5	2.7

Tab. 33