

Advantages



- Using for optimal latching point.
- For quarter-turns with insert GL 18mm and swinghandles for round rods Ø8mm.
- RH and LH version.

Materials

- **Redirect:** zinc die, zinc plated
- **C-clip and setscrew:** steel, zinc plated

Remarks

1. cam position
 2. on the back side of the redirect cam position turned 90°
 3. assembly spacer on weld-stud M6x32
 - c) adapter for round rods (must be ordered by using round rods)
 - d) H-dimension 18mm only for sheet thickness 2mm
 - f) for the use of flat rods please contact us
- Attention:** can only be used for straight cams.

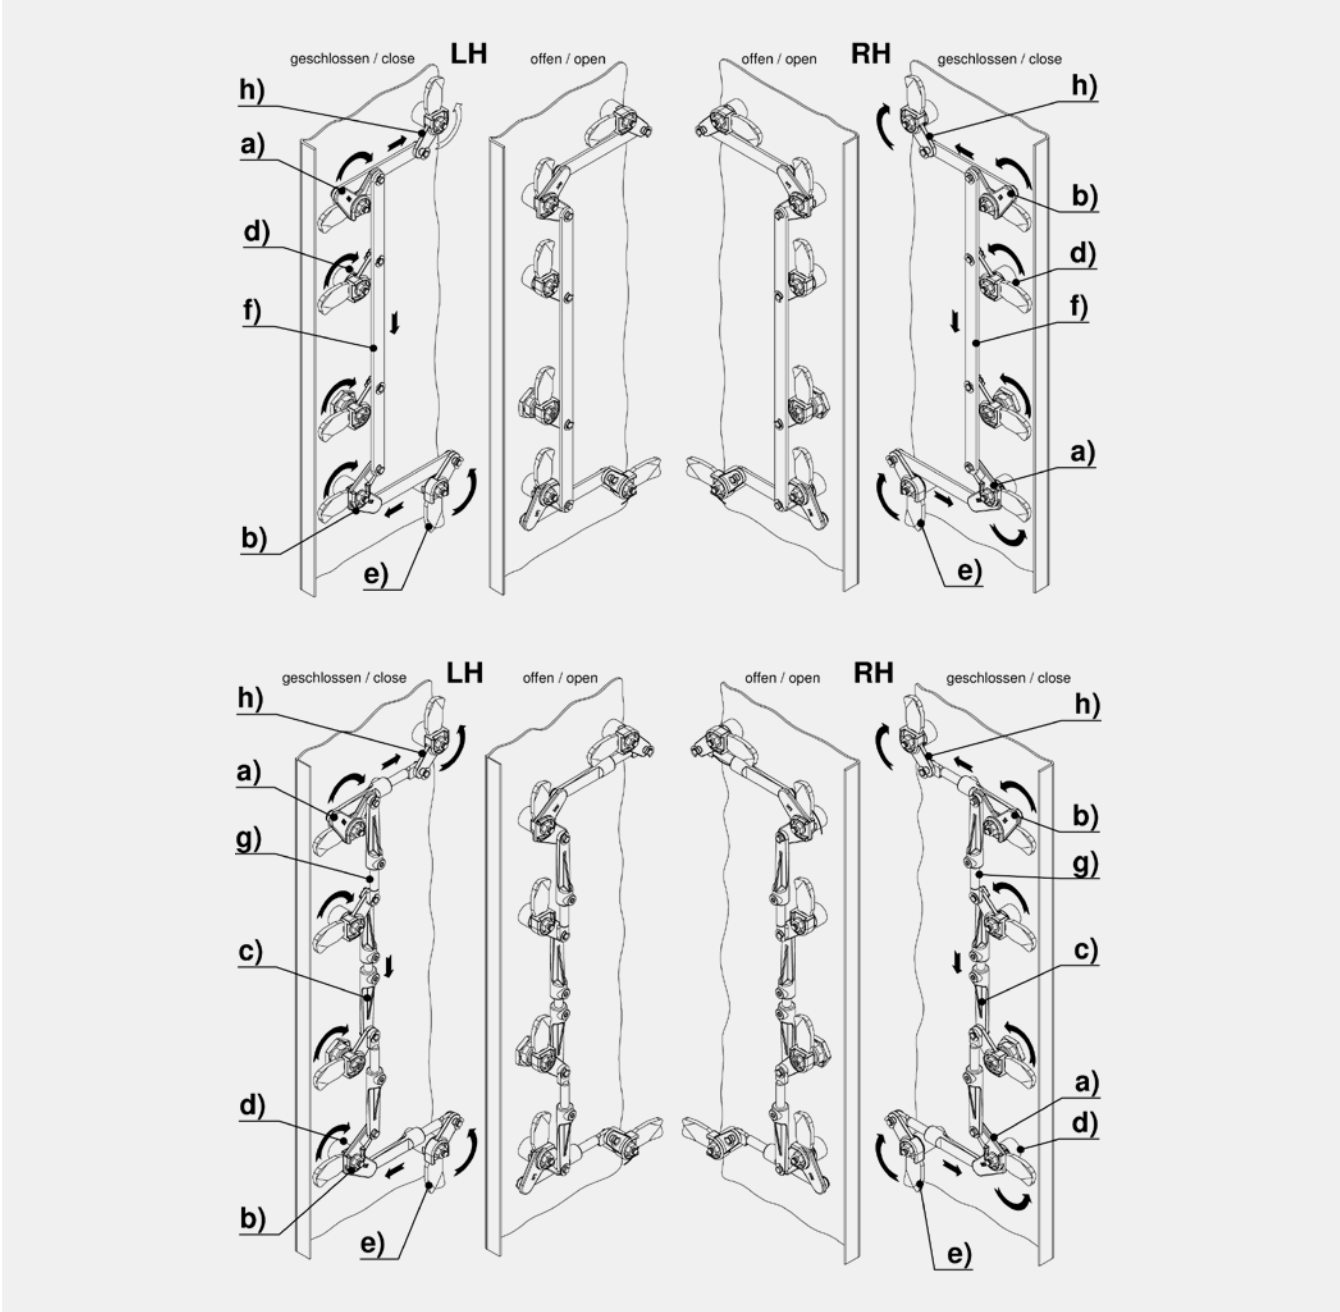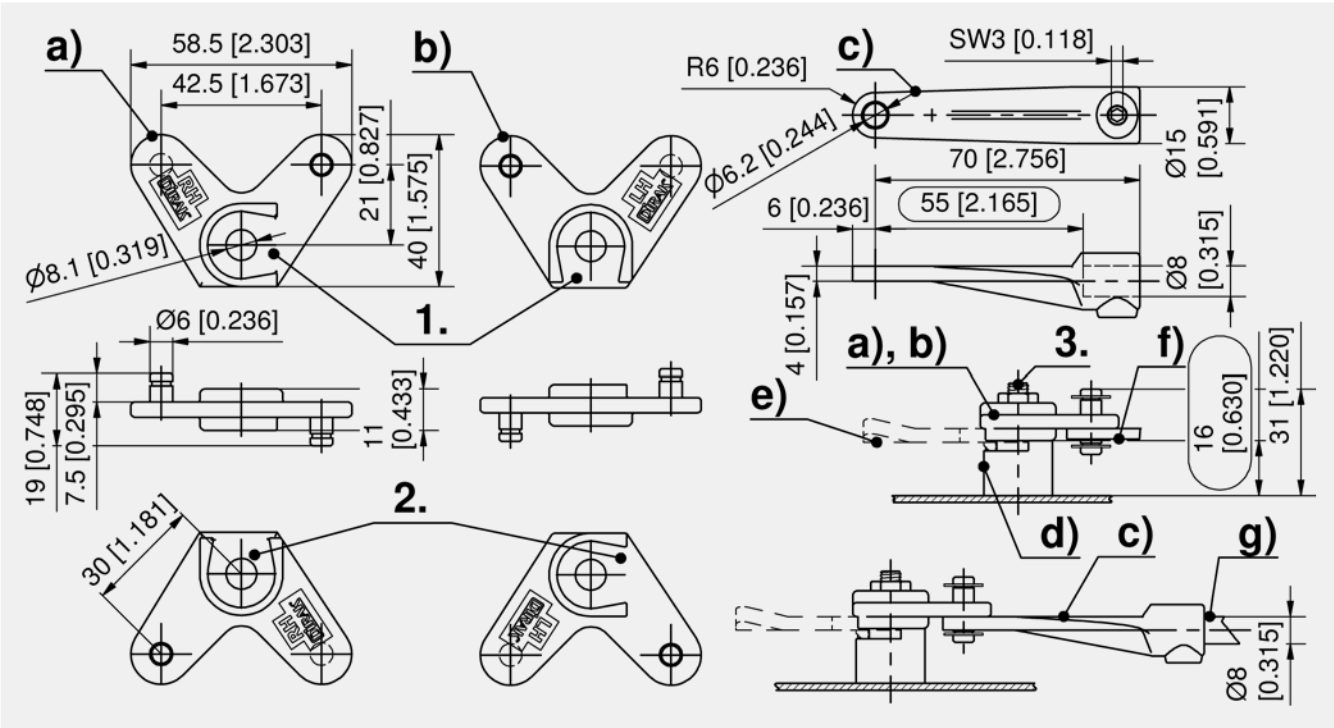

Redirect for multi-point locking system

	Part Number	Version	Installation position	Delivery Unit
a)	100-9613.00-00001	RH version	LH door top/RH door bottom	10 pcs.
b)	100-9613.00-00002	LH version	LH door bottom/RH door top	10 pcs.

Adapter for round rods

	Part Number	for round rod	Delivery Unit
c)	200-9637.00-00000	Ø8	10 pcs.

+	Accessories
e)	154, 292 200-0418.00-00000 Cam
e)	161 200-4018.00-00000 Cam with ramp
g)	179, 283 1-170 Round Rods with Eye
h)	189 100-9033.00-00000 Cam adapter (incl. 2 c-clips)

+	Specific accessories
d)	189 200-2811.35-00000 Spacer

