

**Advantages**


- Swinghandle SOFTLINE with liftable operating lever.
- 90° Closing rotation.
- The swinghandle can be locked with 40mm long profile-cylinders (DIN 18252), key cylinder or insert. Cylinder cam on 45° or 90°.
- Locking stub is included in handle-assembly.
- Available with two different sliding dustcovers.
- IP65 according to DIN 60529 - version dish with cap.
- For non IP65 applications - version dish with hook.
- RH / LH application.
- Grounding by grounding clip (optional).

Materials

- Swinghandle, dish, cap, sliding cover: PA, black

Remarks

- (S) Door-thickness 1.5 - 2.5mm
Drawings for rod calculation (see accessories):
- stroke 18mm
 - clearance
- Inserts must be ordered separately.
- Version b), c) and d) for 40mm PHZ, key cylinder or insert.
- Version a1) and b1) for 40mm PHZ with protruding cylinder head.
- Version c) is supplied with 2 keys.

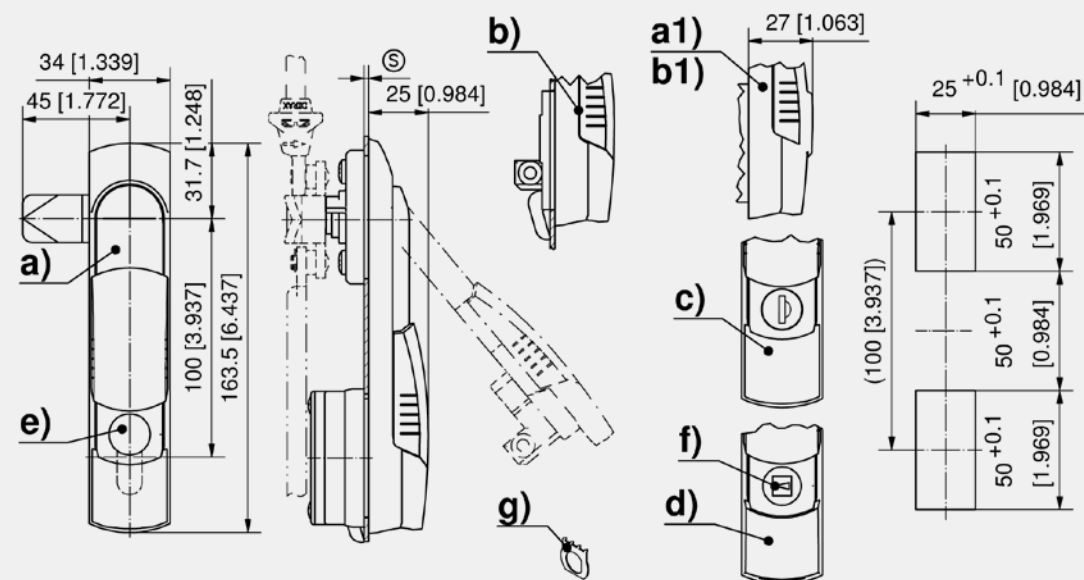

Swinghandle

	Part Number	Latching type	Version	Dish	IP protection	Installation type	Delivery Unit
a)	107-9005.00-00000	for PHZ	for up to 2.5mm protruding cylinder head	with cap	IP65	screw-on	1 pc.
a1)	107-9006.00-00000	for PHZ	for up to 5mm protruding cylinder head	with cap	IP65	screw-on	1 pc.
b)	107-9007.00-00000	for PHZ	for up to 2.5mm protruding cylinder head	with hook		screw-on	1 pc.
b1)	107-9008.00-00000	for PHZ	for up to 5mm protruding cylinder head	with hook		screw-on	1 pc.
c)	107-9018.00-00000	keyed alike DIRAK 1333		with cap	IP65	screw-on	1 pc.
c)	507-9210.00-00000	keyed alike DS200		with cap	IP65	screw-on	1 pc.
c)	107-9020.00-00000	keyed different		with cap	IP65	screw-on	1 pc.
c)	107-9021.00-00000	keyed alike DIRAK 1333		with hook		screw-on	1 pc.
c)	507-9211.00-00000	keyed alike DS200		with hook		screw-on	1 pc.
c)	107-9023.00-00000	keyed different		with hook		screw-on	1 pc.
d)	107-9024.00-00000	for insert		with cap	IP65	screw-on	1 pc.
d)	107-9025.00-00000	for insert		with hook		screw-on	1 pc.

+	Accessories
e)	304, 388 2-140 Profile-Cylinder DIN 18252
f)	303 2-141 Inserts
g)	302, 366 3-011 Grounding Clip Stainless Steel
	154, 292 1-102 Cams L35/45 Steel
	165 1-105 Roller Cam height adjustable
	294 2-150 3-Point Cam L45, Rod Control
	181, 285 1-181 Adapter for Round Rods Ø8mm PA

+	Accessories
	181, 285 1-181.01 Adapter for Round Rods Ø8mm / Ø10mm Zinc Die
	179, 283 1-170 Round Rods with Eye
	180, 284 1-180 Round Rods for Adapter
	186, 290 1-190 Rod Guides RS
	768 6-100 Wrench
	766 6-101 Universal key



2-080.02

all product details
on DIRAK.com

**Advantages**


- Swinghandle with liftable operating lever.
- 90° Closing rotation.
- Swinghandle can be locked with profile-cylinders with 45° or 90° locking cam.
- The listed swinghandles, can be retrofitted with a sliding cap (product system 2-091).
- The sliding cap can be used for profile-cylinders from product system 2-140 and also for raised profile cylinders.
- IP65 according to DIN EN 60529 - version dish with cap.
- RH / LH application.
- Grounding by grounding clip (optional).

Materials

- Handle, dish and cylinder dustcover: see table
- Shaft: brass
- Bearing plate: zinc die, untreated
- Cap: PA, black
- Seals: NBR

Remarks

- (S) Door-thickness 1.5 - 2.5mm
Drawings for rod calculation (see accessories):
- stroke 18mm
 - clearance
- Screws M5x16 for fastening cylinder included.
- Alternative products see also 2-090.01, 2-090.02, 2-090.03, 2-090.04.

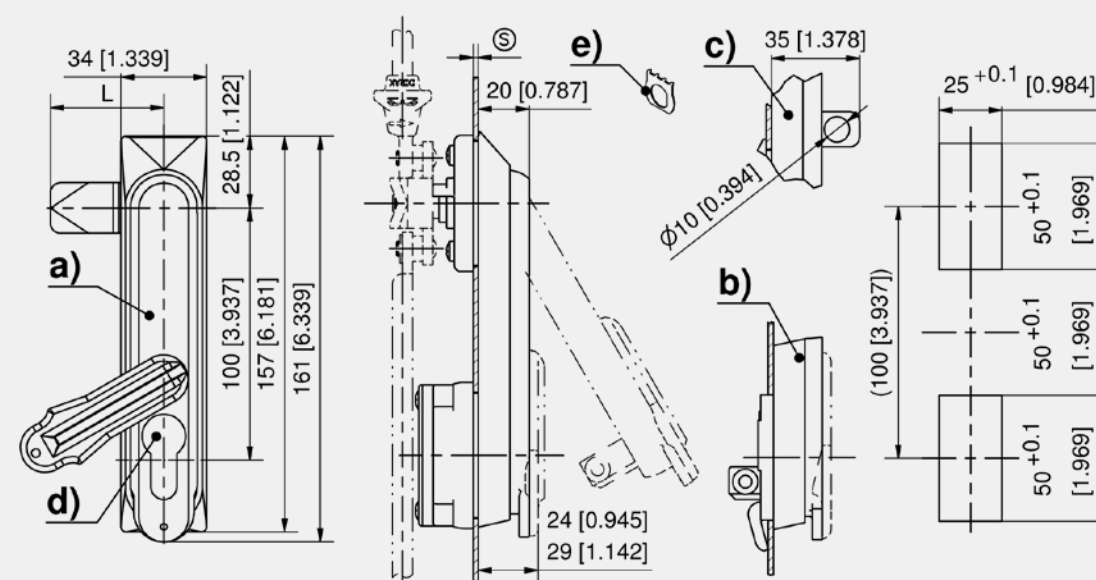

Swinghandle for profile cylinder

	Part Number	Latching type	Handle material	Surface handle	Dish material	Surface dish	Dish	IP protection	Cylinder cover material	Securable	Padlock bolt	Delivery Unit
a)	207-9282.00-00000	PHZ 40mm	PA	black	PA	black	with cap	IP65				1 pc.
a)	207-9283.00-00000	PHZ 40mm	PA	black	PA	black	with cap	IP65	PA	Yes		1 pc.
a)	207-9284.00-00000	PHZ 45mm	PA	black	PA	black	with cap	IP65	PA	Yes		1 pc.
b)	107-9254.00-00000	PHZ 40mm	PA	black	PA	black	with hook					1 pc.
b)	107-9255.00-00000	PHZ 40mm	PA	black	PA	black	with hook		PA	Yes		1 pc.
a)	107-9226.00-00000	PHZ 40mm	zinc die	black	PA	black	with cap	IP65				1 pc.
a)	107-9227.00-00000	PHZ 40mm	zinc die	black	PA	black	with cap	IP65	PA	Yes		1 pc.
a)	107-9228.00-00000	PHZ 45mm	zinc die	black	PA	black	with cap	IP65	PA	Yes		1 pc.
c)	107-9282.00-00000	PHZ 40mm	zinc die	black	PA	black	with cap	IP65			Yes	1 pc.
a)	107-9225.00-00000	PHZ 40mm	zinc die	chrome plated	PA	black	with cap	IP65				1 pc.
a)	107-9208.00-00000	PHZ 40mm	zinc die	black	zinc die	black	with cap	IP65	zinc die	Yes		1 pc.

+	Accessories
d)	304, 388 2-140 Profile-Cylinder DIN 18252
e)	302, 366 3-011 Grounding Clip Stainless Steel
f)	294 2-150 3-Point Cam L45, Rod Control
f)	175, 295 2-151 2-, 3- and 4-Point Cam Adapter
f)	176, 296 2-151.04 3-Point Cam Adapter
g)	181, 285 1-181 Adapter for Round Rods Ø8mm PA

+	Accessories
g)	181, 285 1-181.01 Adapter for Round Rods Ø8mm / Ø10mm Zinc Die
h)	179, 283 1-170 Round Rods with Eye
h)	180, 284 1-180 Round Rods for Adapter
i)	186, 290 1-190 Rod Guides RS
i)	187, 291 1-193 Rod Guide RS
	301 2-091 Sliding Cap



2-090

all product details
on DIRAK.com

Swinghandle RS PrC with Key Cylinder

[2-090.01]

**Advantages**


- Swinghandle with liftable operating lever.
- 90° Closing rotation.
- Swinghandle can be locked by assembled key cylinder with 2 keys.
- The listed swinghandles, can be retrofitted with a sliding cap (product system 2-091).
- IP65 according to DIN EN 60529.
- RH / LH application.
- Grounding by grounding clip (optional).

Materials

- **Handle:** zinc die, chrome plated or black or PA, black
- **Dish, cap and cylinder dust-cover:** PA, black
- **Shaft:** brass
- **Bearing plate:** zinc die, untreated
- **Seals:** NBR

Remarks

- (S) Door-thickness 1.5 - 2.5mm
- Drawings for rod calculation (see accessories):
1. stroke 18mm
 2. clearance
- Alternative products see also 2-090, 2-090.02, 2-090.03, 2-090.04.

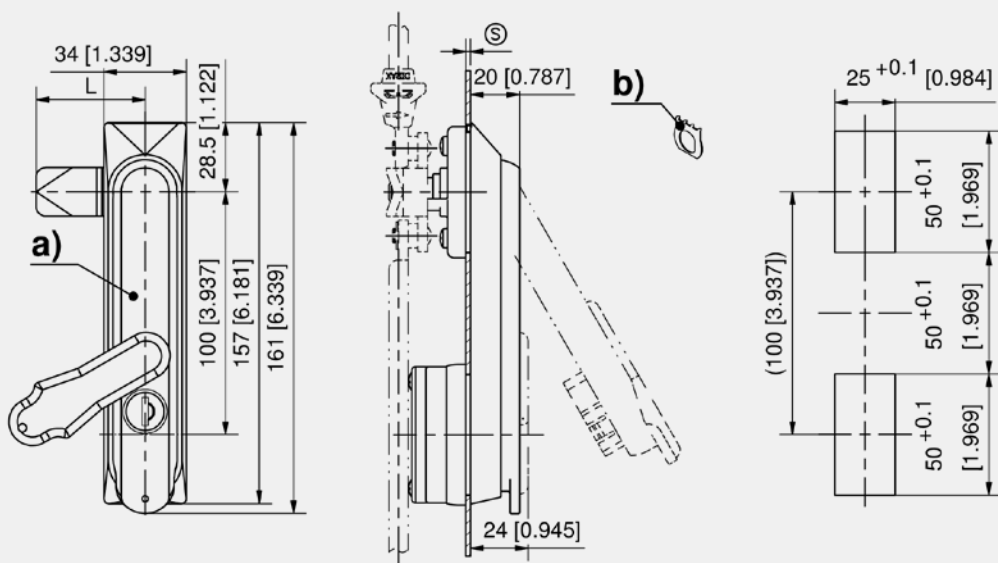

Swinghandle with key cylinder

	Part Number	Latching type	Handle material	Surface handle	Cylinder cover material	Securable	Installation type	Delivery Unit
a)	207-9238.00-00000	keyed alike DIRAK 1333	PA	black			screw-on	1 pc.
a)	207-9240.00-00000	keyed alike DIRAK 1333	PA	black	PA	Yes	screw-on	1 pc.
a)	507-9238.00-00000	keyed alike DS200	PA	black			screw-on	1 pc.
a)	507-9240.00-00000	keyed alike DS200	PA	black	PA	Yes	screw-on	1 pc.
a)	207-9239.00-00000	keyed different	PA	black			screw-on	1 pc.
a)	207-9241.00-00000	keyed different	PA	black	PA	Yes	screw-on	1 pc.
a)	107-9201.00-00000	keyed alike DIRAK 1333	zinc die	chrome plated			screw-on	1 pc.
a)	107-9202.00-00000	keyed alike DIRAK 1333	zinc die	black			screw-on	1 pc.
a)	507-9201.00-00000	keyed alike DS200	zinc die	chrome plated			screw-on	1 pc.
a)	507-9202.00-00000	keyed alike DS200	zinc die	black			screw-on	1 pc.
a)	107-9203.00-00000	keyed different	zinc die	chrome plated			screw-on	1 pc.
a)	107-9204.00-00000	keyed different	zinc die	black			screw-on	1 pc.

Accessories		
b)	302, 366	3-011 Grounding Clip Stainless Steel
f)	294	2-150 3-Point Cam L45, Rod Control
f)	175, 295	2-151 2-, 3- and 4-Point Cam Adapter
f)	176, 296	2-151.04 3-Point Cam Adapter
g)	181, 285	1-181 Adapter for Round Rods Ø8mm PA
g)	181, 285	1-181.01 Adapter for Round Rods Ø8mm / Ø10mm Zinc Die

Accessories		
h)	179, 283	1-170 Round Rods with Eye
h)	180, 284	1-180 Round Rods for Adapter
i)	186, 290	1-190 Rod Guides RS
i)	187, 291	1-193 Rod Guide RS
	301	2-091 Sliding Cap



2-090.01

all product details
on DIRAK.com

Swinghandle RS PrC with Combination Lock

[2-090.02]

**Advantages**


- Swinghandle with liftable operating lever.
- 90° Closing rotation.
- Swinghandle can be locked by combination lock and assembled key cylinder with 2 keys.
- Modifying the combination only in opened state possible.
- IP65 according to DIN EN 60529 - version dish with cap.
- RH / LH application.
- Grounding by grounding nut (optional).
- Version c) two opening options:
1. with fixed number code for the combination lock, 2. by turning the key in the cylinder. The combination lock is and remains in locked position. The cylinder has the "override" function.

Materials

- **Handle:** zinc die, chrome plated or black or PA, black
- **Dish and cap:** PA, black
- **Shaft:** brass
- **Bearing plate:** zinc die, untreated
- **Seals:** NBR

Remarks

- (S) Door-thickness 1.5 - 2.5mm
- Alternative products see also 2-090, 2-090.01, 2-090.03, 2-090.04.
- Drawings for rod calculation (see accessories):
1. stroke 18mm
 2. clearance

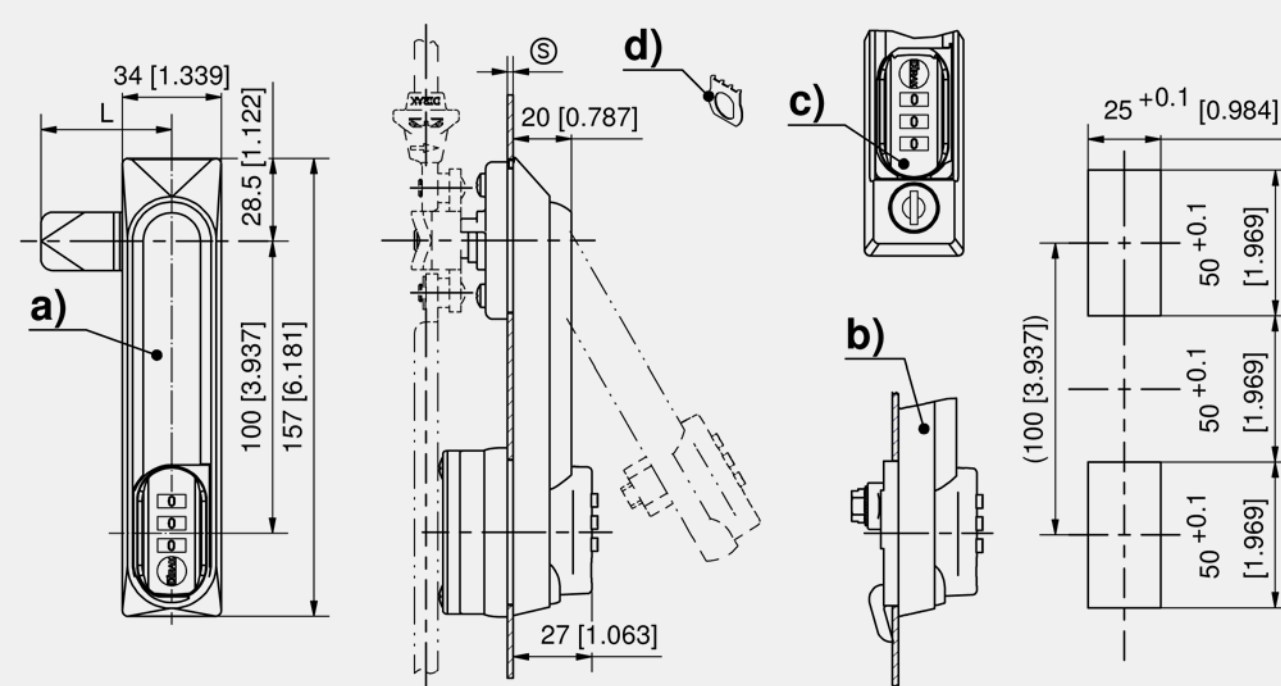

Swinghandle

	Part Number	Latching type	Handle material	Surface handle	Dish	IP protection	Installation type	Delivery Unit
a)	107-9268.00-00000	combination lock	zinc die	chrome plated	with cap	IP65	screw-on	1 pc.
a)	107-9270.00-00000	combination lock	zinc die	black	with cap	IP65	screw-on	1 pc.
b)	107-9269.00-00000	combination lock	zinc die	chrome plated	with hook		screw-on	1 pc.
b)	107-9271.00-00000	combination lock	zinc die	black	with hook		screw-on	1 pc.
c)	107-9277.00-00000	combination lock and keyed alike DIRAK 1333	PA	black	with cap	IP65	screw-on	1 pc.
c)	107-9278.00-00000	combination lock and keyed different	PA	black	with cap	IP65	screw-on	1 pc.

Accessories		
d)	302, 366	3-011 Grounding Clip Stainless Steel
f)	294	2-150 3-Point Cam L45, Rod Control
f)	175, 295	2-151 2-, 3- and 4-Point Cam Adapter
f)	176, 296	2-151.04 3-Point Cam Adapter
g)	181, 285	1-181 Adapter for Round Rods Ø8mm PA

Accessories		
g)	181, 285	1-181.01 Adapter for Round Rods Ø8mm / Ø10mm Zinc Die
h)	179, 283	1-170 Round Rods with Eye
h)	180, 284	1-180 Round Rods for Adapter
i)	186, 290	1-190 Rod Guides RS
i)	187, 291	1-193 Rod Guide RS



2-090.02

all product details
on DIRAK.com

Swinghandle RS PrC for Inserts

[2-090.03]

**Advantages**

- Swinghandle with liftable operating lever.
- 90° Closing rotation.
- Swinghandle can be locked with inserts (inserts must be ordered separately).
- IP65 according to DIN EN 60529 - version dish with cap.
- RH / LH application.
- Grounding by grounding nut (optional).

Materials

- **Handle:** zinc die, chrome plated or black or PA, black
- **Dish and cap:** PA, black
- **Shaft:** brass
- **Bearing plate:** zinc die, untreated
- **Seals:** NBR

Remarks

- (S) Door-thickness 1.5 - 2.5mm
- Drawings for rod calculation (see accessories):
1. stroke 18mm
 2. clearance
- Alternative products see also 2-090, 2-090.01, 2-090.02, 2-090.04.

Swinghandle RS PrC self-locking

[2-090.04]

**Advantages**


- Swinghandle with liftable operating lever.
- 90° Closing rotation.
- Swinghandle can be locked by detents.
- IP65 according to DIN EN 60529 - version dish with cap.
- RH / LH application.
- Grounding by grounding nut (optional).

Materials

- **Handle, dish and cap:** PA, black
- **Shaft:** brass
- **Bearing plate:** zinc die, untreated
- **Seals:** NBR

Remarks

- (S) Door-thickness 1.5 - 2.5mm
- Drawings for rod calculation (see accessories):
1. stroke 18mm
 2. clearance
- Alternative products see also 2-090, 2-090.01, 2-090.02, 2-090.03.

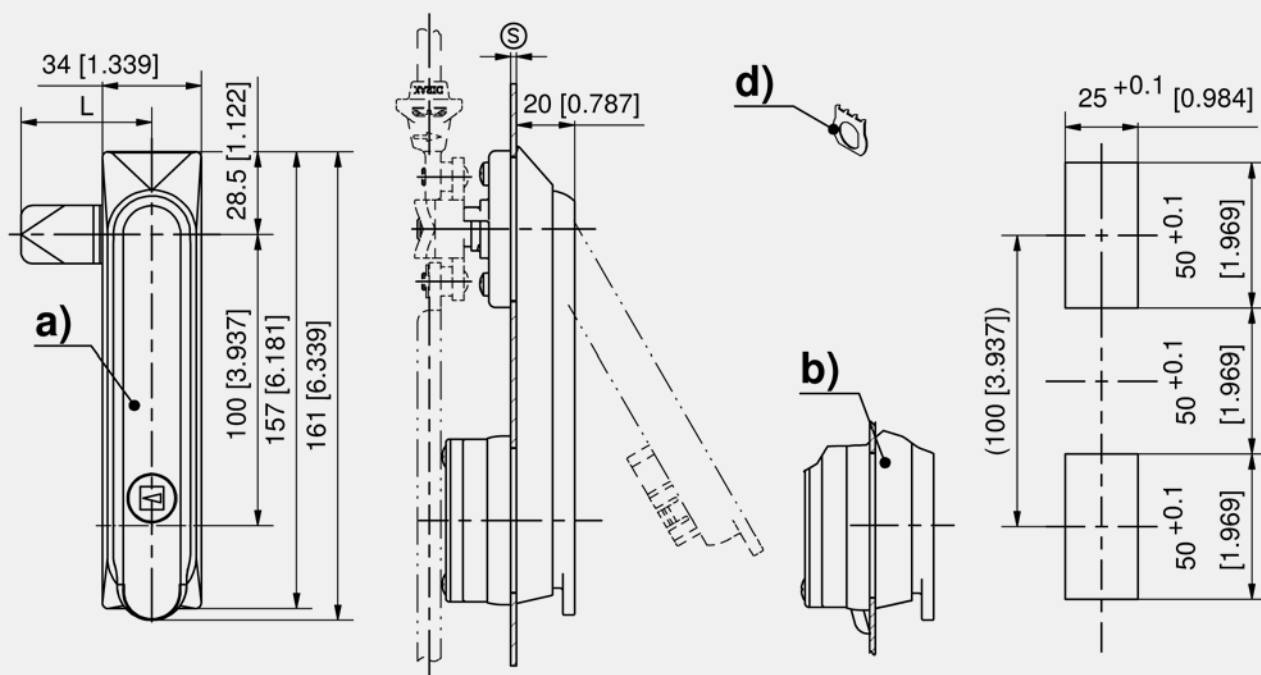


Swinghandle for inserts

	Part Number	Handle material	Surface handle	Dish	IP protection	Installation type	Delivery Unit
a)	207-9244.00-00000	PA	black	with cap	IP65	screw-on	1 pc.
b)	107-9279.00-00000	PA	black	with hook		screw-on	1 pc.
a)	107-9205.00-00000	zinc die	chrome plated	with cap	IP65	screw-on	1 pc.
a)	107-9206.00-00000	zinc die	black	with cap	IP65	screw-on	1 pc.

+	Accessories
c)	303 2-141 Inserts
d)	302, 366 3-011 Grounding Clip Stainless Steel
f)	294 2-150 3-Point Cam L45, Rod Control
f)	175, 295 2-151 2-, 3- and 4-Point Cam Adapter
f)	176, 296 2-151.04 3-Point Cam Adapter
g)	181, 285 1-181 Adapter for Round Rods Ø8mm PA
g)	181, 285 1-181.01 Adapter for Round Rods Ø8mm / Ø10mm Zinc Die
h)	179, 283 1-170 Round Rods with Eye
h)	180, 284 1-180 Round Rods for Adapter

+	Accessories
i)	186, 290 1-190 Rod Guides RS
i)	187, 291 1-193 Rod Guide RS
	768 6-100 Wrench
	766 6-101 Universal key

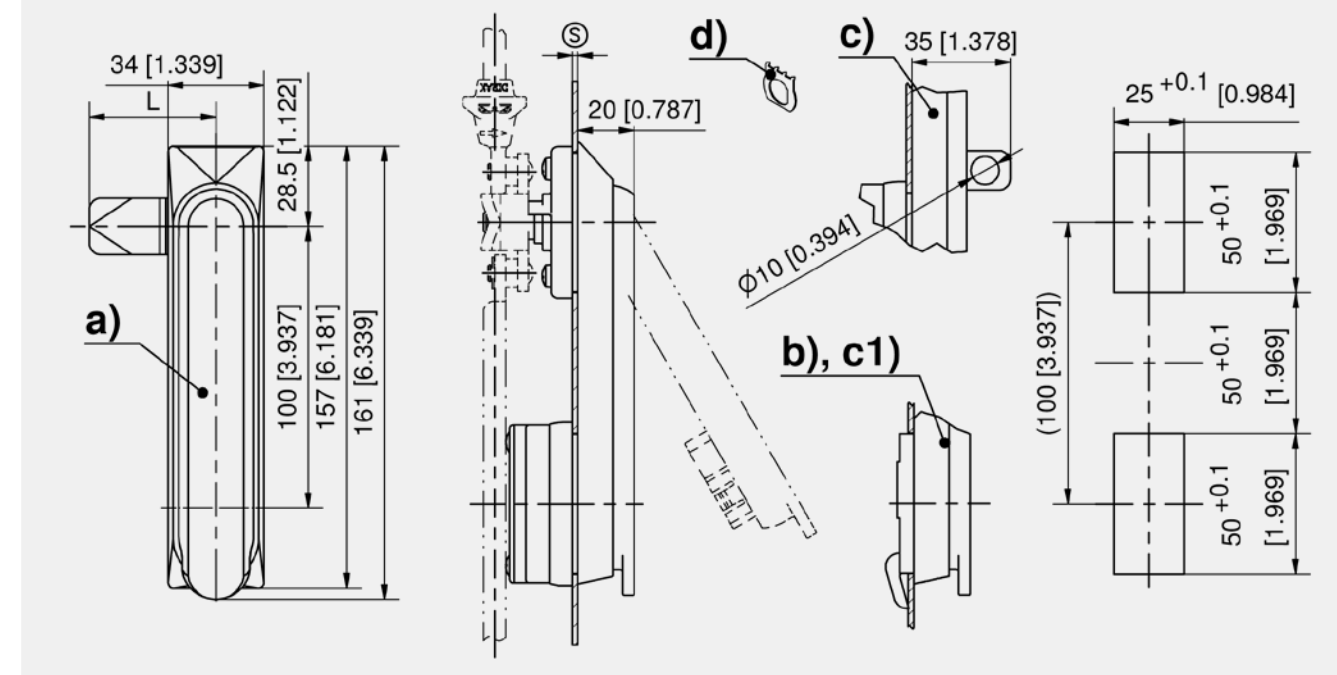

Swinghandle PA, self-locking, handle closed

	Part Number	Dish	Padlock bolt	IP protection	Installation type	Delivery Unit
a)	107-9260.00-00000	with cap		IP65	screw-on	1 pc.
b)	107-9261.00-00000	with hook			screw-on	1 pc.
c)	107-9262.00-00000	with cap	Yes	IP65	screw-on	1 pc.
c1)	107-9263.00-00000	with hook	Yes		screw-on	1 pc.

+	Accessories
d)	302, 366 3-011 Grounding Clip Stainless Steel
f)	294 2-150 3-Point Cam L45, Rod Control
f)	175, 295 2-151 2-, 3- and 4-Point Cam Adapter
f)	176, 296 2-151.04 3-Point Cam Adapter
g)	181, 285 1-181 Adapter for Round Rods Ø8mm PA
g)	181, 285 1-181.01 Adapter for Round Rods Ø8mm / Ø10mm Zinc Die
h)	179, 283 1-170 Round Rods with Eye
h)	180, 284 1-180 Round Rods for Adapter
i)	186, 290 1-190 Rod Guides RS
i)	187, 291 1-193 Rod Guide RS

