

Concealed Hinge Pr03 120°

[4-135]



Advantages

- For surface mounted doors.
- Hinge concealed.
- Door bending 23mm.
- RH and LH application.
- 120° Opening angle.
- Two different fastenings on the door.
- Frame-part: screw-on e.g. cross recessed raised cheese head screw M6 DIN EN ISO 7045.

Materials


- **Door-part:** steel, untreated
- **Frame-part and pin:** steel, zinc plated

Remarks

- a) door-part to be **weld-on** on the **door leaf**
- b) door-part to be **weld-on** on the **door bending**

Corner Hinge two-part Pr04 180°

[4-190]

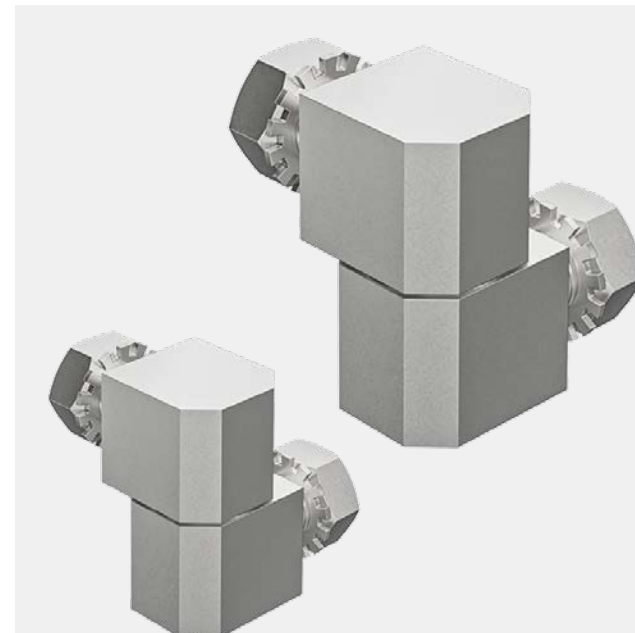

Advantages


- For surface mounted doors.
- Hinge visible.
- 2 parts.
- 180° Opening angle.

Materials

- **Hinge:** steel, zinc plated, brass untreated
- **Nuts and serrated washers:** steel, zinc plated
- **Bearing washer:** brass, nickel plated
- **Pin:** steel, nickel plated


Remarks

- 2 nuts and serrated washers are included
- Fastening with M6 or M8
- 1. bearing washer
- 2. Lift-off mounted
- 3. non Lift-off mounted

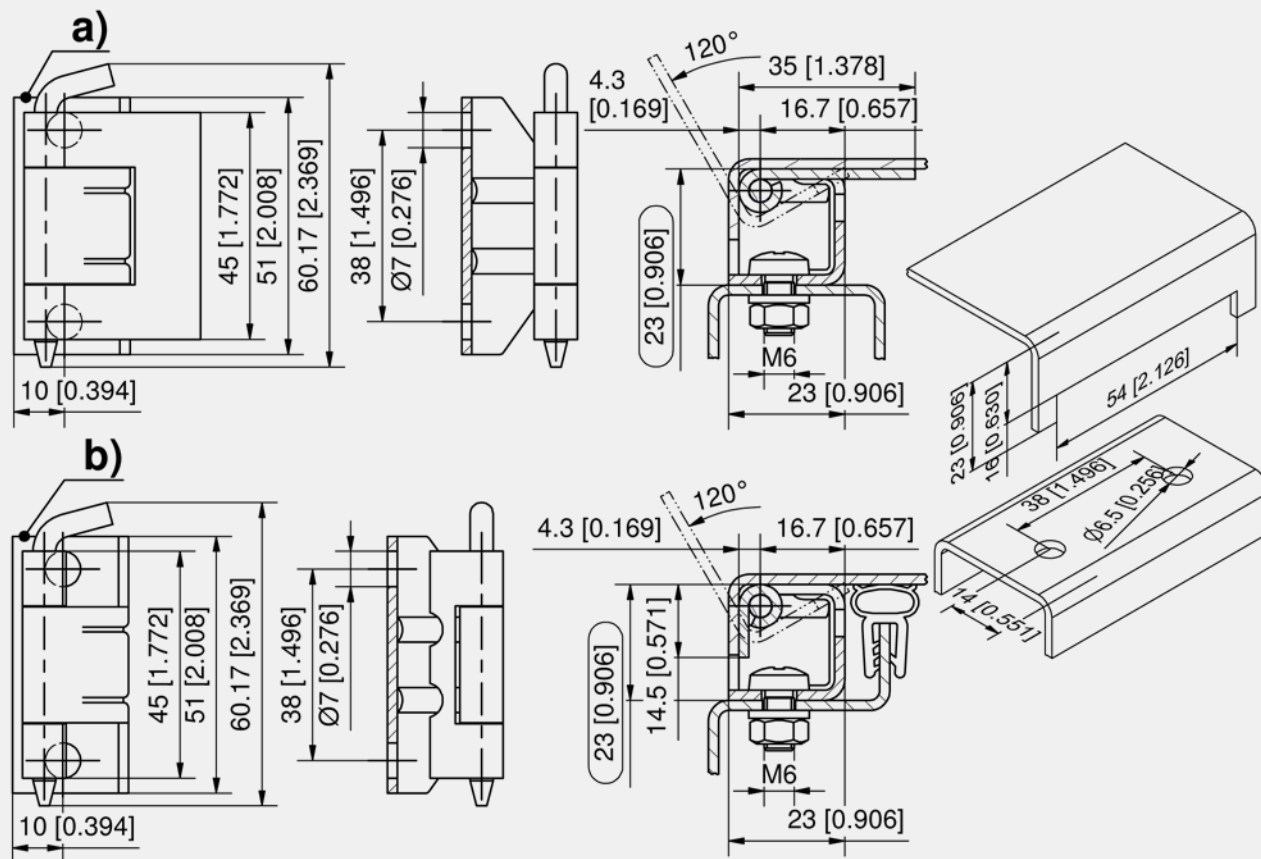

Concealed hinge

	Part Number	Pin version	Installation type	Delivery Unit
a)	216-9008.00-00000	loose	screw- / weld-on	10 pcs.
b)	216-9013.00-00000	loose	screw- / weld-on	10 pcs.

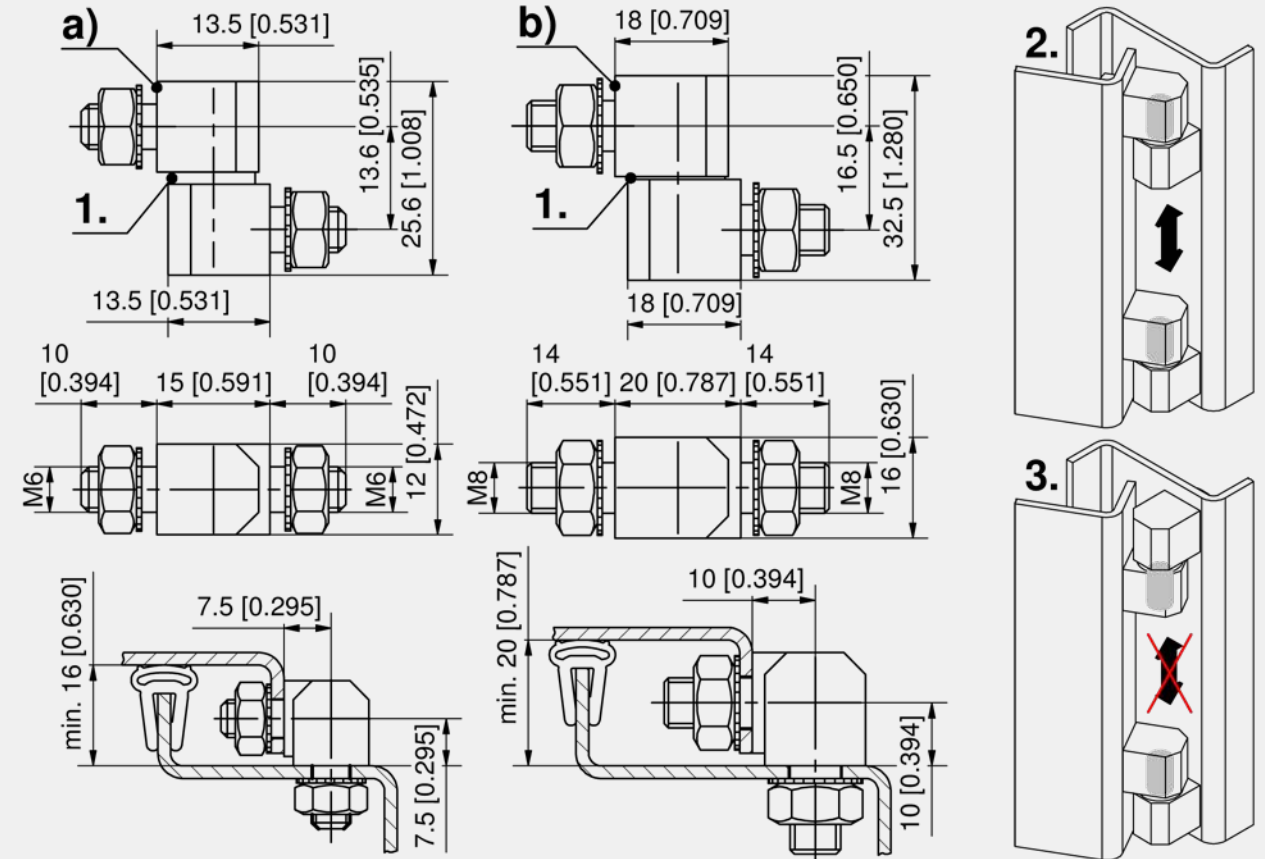

Corner hinge

	Part Number	Material	Surface	Pin version	Installation type	Delivery Unit
a)	219-9005.00-00000	steel	zinc plated	loose	screw-on M6	10 pcs.
b)	219-9111.00-00000	steel	zinc plated	loose	screw-on M8	10 pcs.
b)	219-9112.00-00000	brass	untreated	loose	screw-on M8	10 pcs.

