



RoHS  
WEEE



#### Advantages


- Can be installed without tools.
- Suitable for different door-thicknesses.

#### Materials

- Dish handle: PA, black

#### Remarks

The dimensions of the cutouts for different door-thicknesses are indicated in the table.

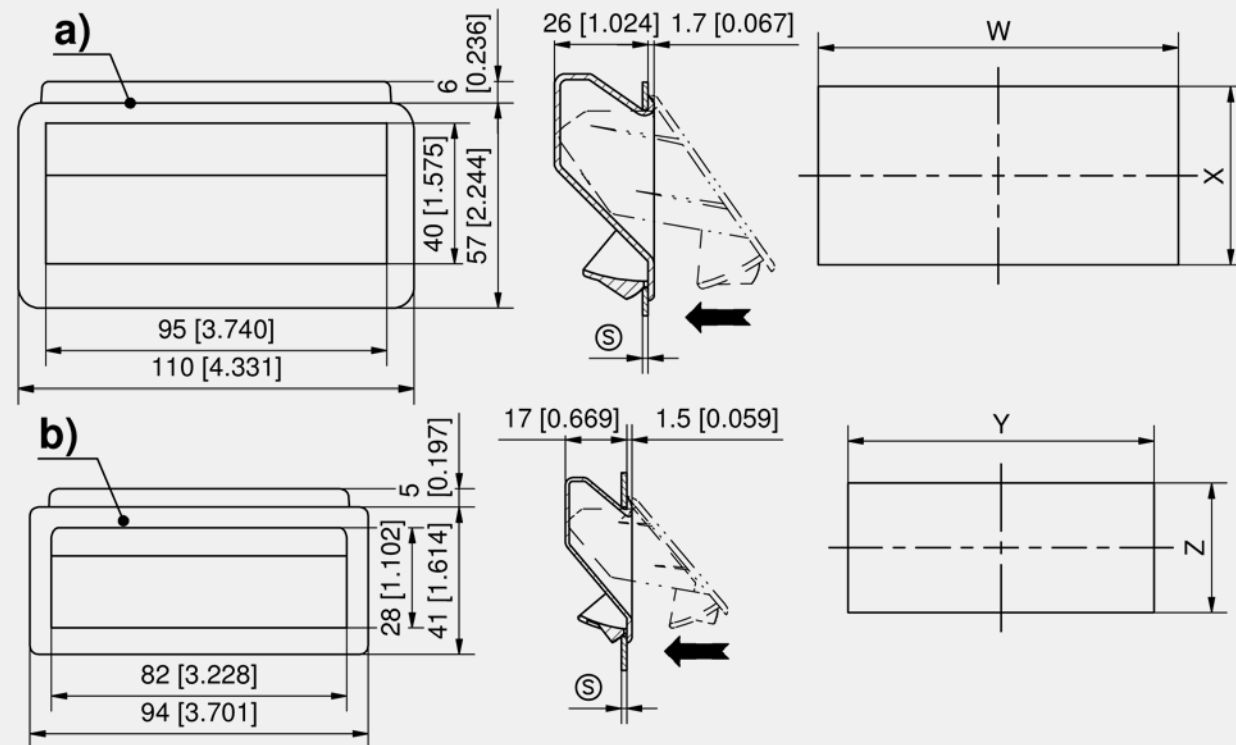

| Door-thickness mm [inch]  | W                  | X                  |
|---------------------------|--------------------|--------------------|
| 1.5 – 1.9 [0.059 – 0.075] | 100 + 0.5 [3.937]  | 49.6 + 0.2 [1.953] |
| 2.0 – 3.1 [0.079 – 0.122] | 100 + 0.5 [3.937]  | 50.3 + 0.3 [1.980] |
| 3.2 – 3.5 [0.126 – 0.138] | 100 + 0.5 [3.937]  | 51.0 + 0.3 [2.008] |
|                           | Y                  | Z                  |
| 0.8 – 1.4 [0.032 – 0.056] | 85.0 + 0.2 [3.346] | 35.0 + 0.2 [1.378] |
| 1.5 – 2.2 [0.060 – 0.087] | 85.0 + 0.2 [3.346] | 36.0 + 0.3 [1.417] |

#### Recessed handle

|    | Part Number       | Dimension   | Installation type | Delivery Unit |
|----|-------------------|-------------|-------------------|---------------|
| a) | 213-0705.51-00000 | 110 x 57 mm | clip-in           | 10 pcs.       |
| b) | 213-0703.03-00000 | 94 x 41 mm  | clip-in           | 10 pcs.       |



IP  
65

RoHS  
WEEE



#### Advantages


- Recessed handle with DIRAK-SNAP-Technology.
- Almost flush.
- Great handle recess.
- IP65 according to DIN EN 60529.
- Tool-less installation.

#### Materials

- Recessed handle: PA, grey
- Snap wedges: sintered steel
- Sealing: EPDM, closed-cell

#### Remarks

- self-adhesive seal

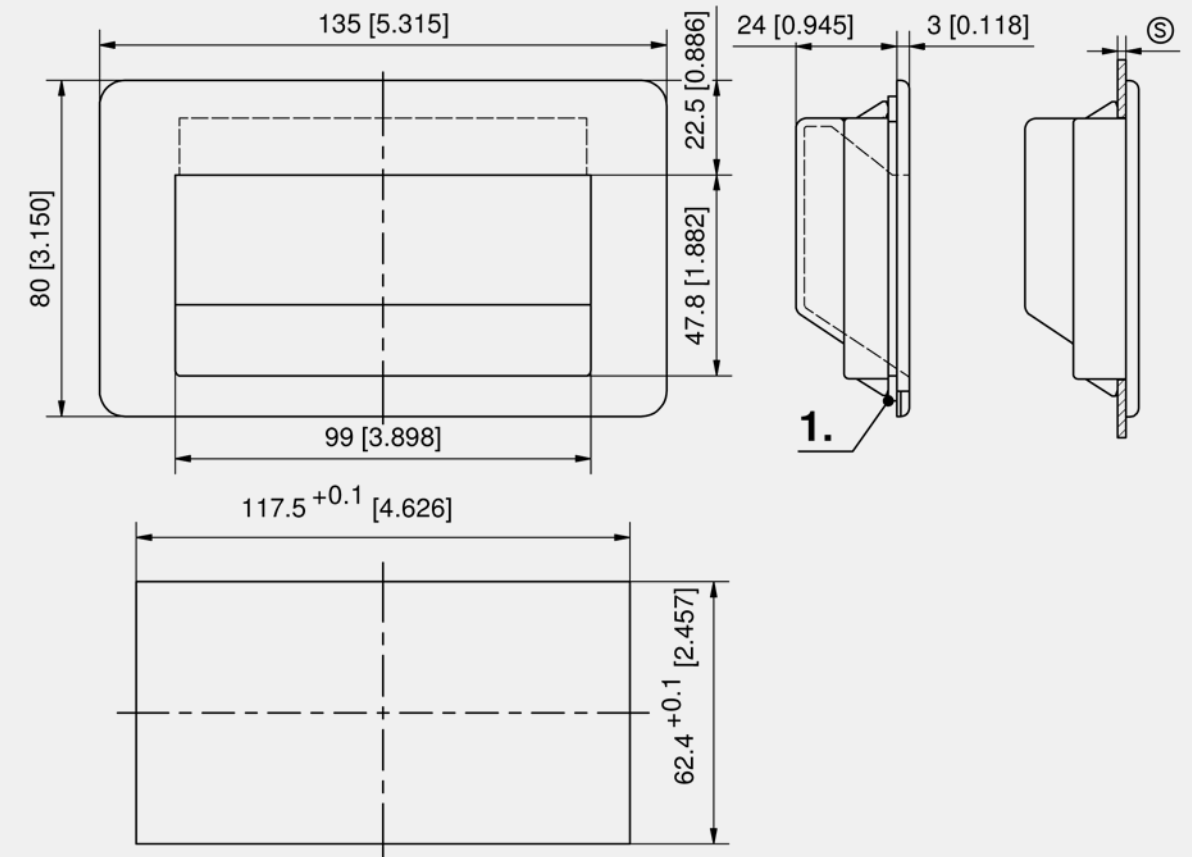

#### Recessed handle

| Part Number       | Dimension   | Clamping range (S) | Installation type | Delivery Unit |
|-------------------|-------------|--------------------|-------------------|---------------|
| 352-2161.03-000CF | 135 x 80 mm | 1.0 - 1.7 mm       | tool-less         | 10 pcs.       |
| 352-2161.03-000CJ | 135 x 80 mm | 1.8 - 2.5 mm       | tool-less         | 10 pcs.       |

