

Quarter-Turn with L-Handle Pr20.1 L18 Stainless Steel [7-103]



Advantages

- IP65 according to DIN EN 60529.
- RH / LH application.
- Grounding by grounding nut.
- On request parts can be assembled.
- A pre-assembled quarter-turn can be installed in the cutout.
- All lockable L-handles supplied with two keys.

Materials

- **L-handle:** AISI 316, surface polished
- **Nut, grounding nut:** stainless steel

Remarks

(S) Door-thickness max. 8mm  
Please configure the quarter-turn with a cam.  
Price and delivery time on request!  
1. flat external seal

Quarter-Turn with L-Handle Pr20.1 L30/50 [7-095.01]



Advantages



- Quarter-turn with L-handle with extended housing.
- IP65 according to DIN EN 60529.
- RH / LH application.
- Grounding by single sided grounding nut.
- Pre-assembled without cam.
- All lockable handles supplied with two keys.

Materials

- **Handle:** AISI 316, satin polished
- **Housing, grounding nut and adapter:** stainless steel
- **Flat external seal:** NBR, black

Remarks

Please configure the quarter-turn with a cam.  
Price and delivery time on request.  
Maximum door-thickness 20mm / 40mm.  
Further housing lengths on request.  
1. flat external seal

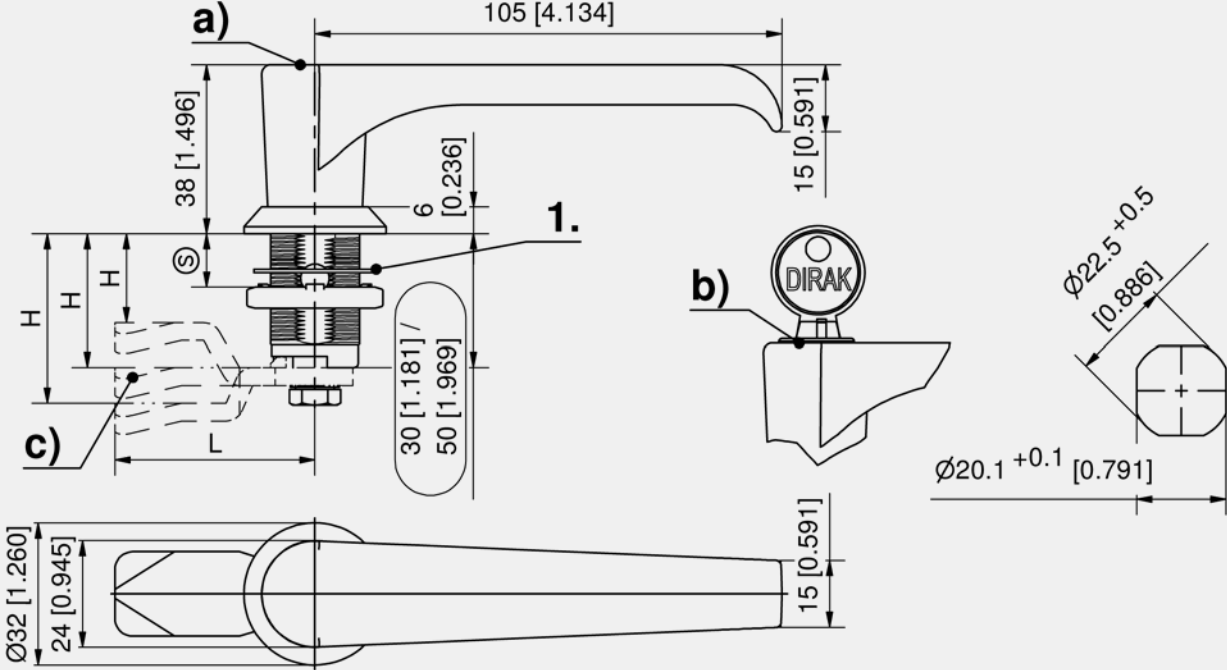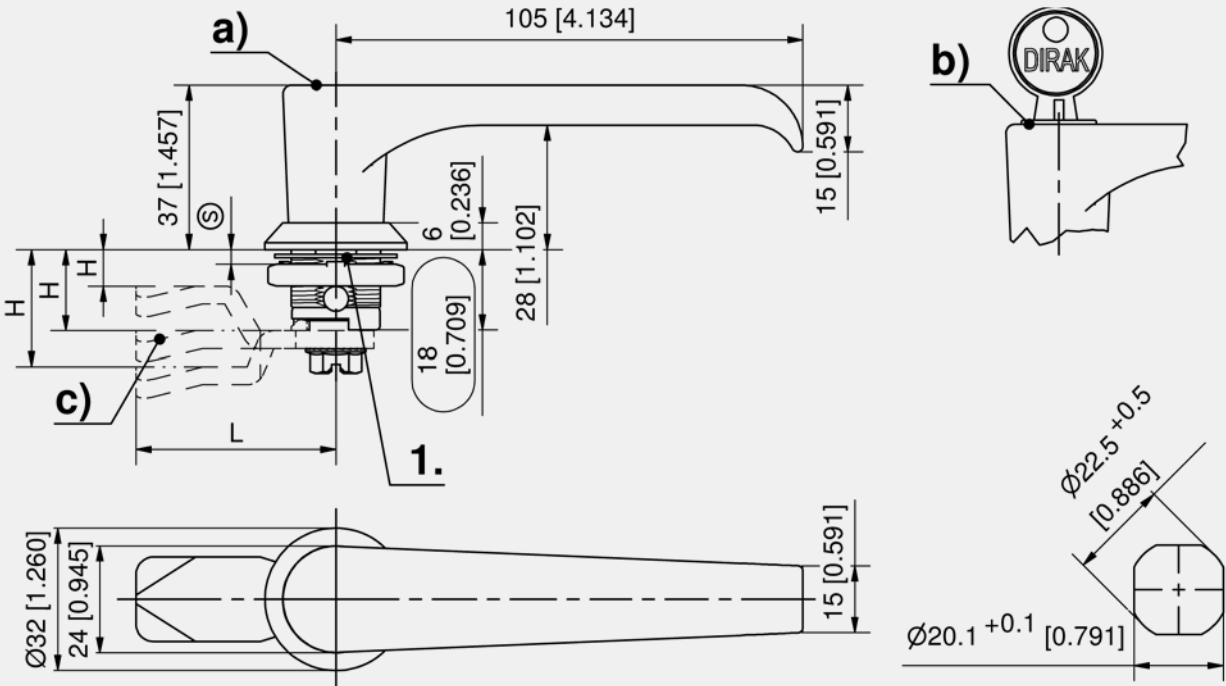

Quarter-Turn with L-handle

|             | Part Number       | Latching type                                                                                                                                                 | Installation type | Delivery Unit |
|-------------|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|---------------|
| a)          | 200-9418.00-00000 | keyed alike DIRAK 1333<br>keyed different                                                                                                                     | screw-on          | 1 pc.         |
| b)          | 200-9485.00-00000 |                                                                                                                                                               | screw-on          | 1 pc.         |
| b)          | 200-9486.00-00000 |                                                                                                                                                               | screw-on          | 1 pc.         |
| Accessories |                   | Assembly options                                                                                                                                              |                   |               |
| c)          | 154, 292          | 1-102 Cams L35/45 Steel                                                                                                                                       |                   |               |
| c)          | 161               | 1-262 Cams variable                                                                                                                                           |                   |               |
| c)          | 156               | 7-105 Cams L35/45 Stainless Steel                                                                                                                             |                   |               |
|             |                   | 200-0001.00-00000 Assembling cam without o-ring<br>200-0019.00-00000 Assembling cam 90° to handle without o-ring<br>200-0020.00-00000 Assembling cam, LH door |                   |               |

Quarter-Turn with L-handle

|                                                                                       | Part Number       | Housing length                    | Latching type                             | Door-thickness (S)                                                                    | Installation type | Delivery Unit |
|---------------------------------------------------------------------------------------|-------------------|-----------------------------------|-------------------------------------------|---------------------------------------------------------------------------------------|-------------------|---------------|
| a)                                                                                    | 100-9407.00-00000 | 30 mm                             | keyed alike DIRAK 1333<br>keyed different | max. 20 mm                                                                            | screw-on          | 1 pc.         |
| b)                                                                                    | 100-9408.00-00000 | 30 mm                             |                                           | max. 20 mm                                                                            | screw-on          | 1 pc.         |
| b)                                                                                    | 100-9409.00-00000 | 30 mm                             |                                           | max. 20 mm                                                                            | screw-on          | 1 pc.         |
| a)                                                                                    | 100-9410.00-00000 | 50 mm                             | keyed alike DIRAK 1333<br>keyed different | max. 40 mm                                                                            | screw-on          | 1 pc.         |
| b)                                                                                    | 100-9411.00-00000 | 50 mm                             |                                           | max. 40 mm                                                                            | screw-on          | 1 pc.         |
| b)                                                                                    | 100-9412.00-00000 | 50 mm                             |                                           | max. 40 mm                                                                            | screw-on          | 1 pc.         |
|                                                                                       |                   |                                   |                                           |                                                                                       |                   |               |
|  | Accessories       |                                   |                                           |  | Assembly options  |               |
| c)                                                                                    | 154, 292          | 1-102 Cams L35/45 Steel           |                                           | 200-0001.00-00000 Assembling cam without o-ring                                       |                   |               |
| c)                                                                                    | 161               | 1-262 Cams variable               |                                           | 200-0019.00-00000 Assembling cam 90° to handle without o-ring                         |                   |               |
| c)                                                                                    | 156               | 7-105 Cams L35/45 Stainless Steel |                                           | 200-0020.00-00000 Assembling cam, LH door                                             |                   |               |

