

Loose Slot Tenons • DIN 6323

EH 23120.



PRODUCT DESCRIPTION


To be used for locating fixtures and clamping elements onto machine tables with T-slots to DIN 650.

Being simply pushed into position after fixture or clamping element has been roughly positioned, they cannot cause damage to the machine as could protruding fixed slot tenons or low slot tenons.

Material

- Steel, case-hardened, blackened, ground


DRAWING

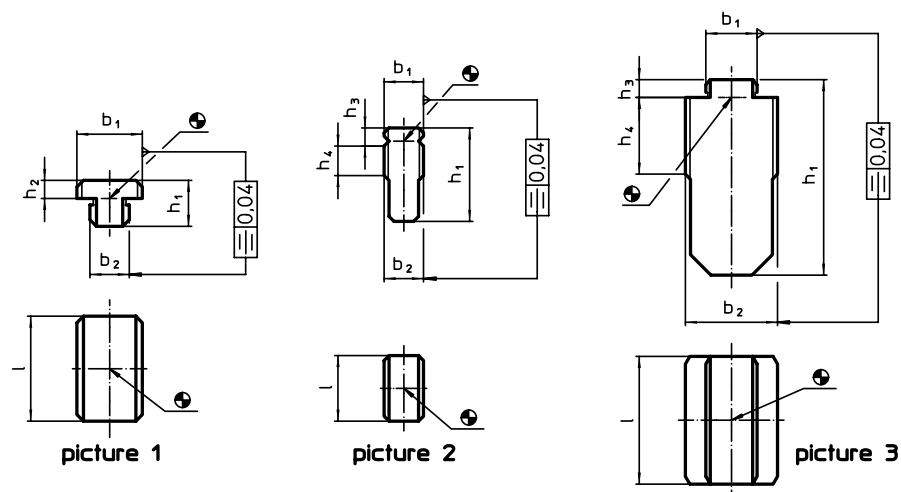

ORDER INFORMATION

T-slot size fixture b ₁ h ₆ [mm]	T-slot size machine b ₂ h ₆ [mm]	Dimensions						Art. No.
		h ₁	h ₂	h ₃	h ₄	l		
				[mm]			[g]	
form A, b ₁ > b ₂ – picture 1								
12	10	12.0	3.6	–	–	20	20	23120.0010
	12	14.0	5.5	–	–	32	52	23120.0012
	14	14.0	5.5	–	–	32	56	23120.0014
	16	14.0	5.5	–	–	32	61	23120.0016
	18	14.0	5.5	–	–	32	65	23120.0018
form B, b ₁ = b ₂ – picture 2								
12	12	28.6	–	5.5	9	20	45	23120.0011
20	20	45.5	–	7.0	16	32	199	23120.0020
form C, b ₁ < b ₂ – picture 3								
20	22	50.5	–	7.0	18	40	305	23120.0022
	28	61.5	–	7.0	24	40	472	23120.0028
	36	76.5	–	7.0	30	50	952	23120.0036

APPLICATION EXAMPLE

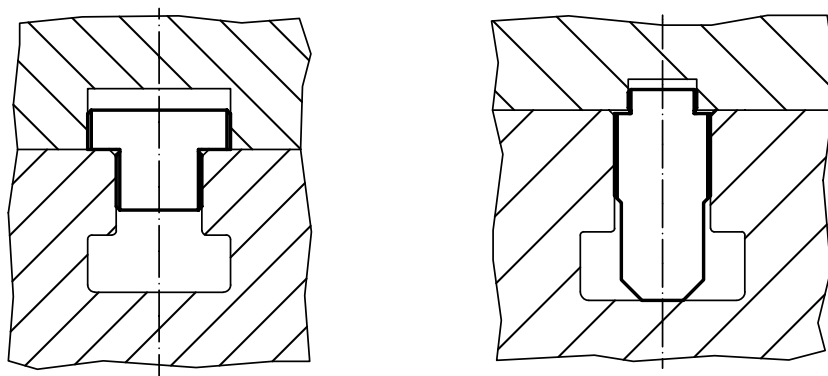

Low Slot Tenons

EH 23130.



PRODUCT DESCRIPTION

To be used for locating fixtures and clamping elements onto machine tables with T-slots to DIN 650.


Material

- Steel, case-hardened, blackened, ground

Assembly

They are bolted into the alignment slots of the fixture. Low slot tenons are suitable for use where a fixture will only be used on machines having an identical slot width.

DRAWING

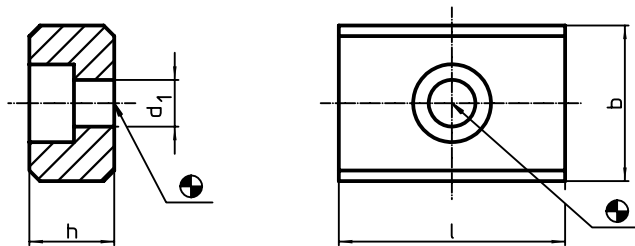

ORDER INFORMATION

b h6	Dimensions			For screws ISO 4762	 [g]	Art. No.
	h	l	d ₁			
				[mm]		
10	8	20	4.5	M4	11	23130.0010
12	8	20	5.5	M5	11	23130.0012
14	10	22	6.6	M6	18	23130.0014
16	10	22	6.6	M6	22	23130.0016
18	10	22	6.6	M6	25	23130.0018
20	10	22	6.6	M6	29	23130.0020
22	12	32	6.6	M6	60	23130.0022
24	12	32	6.6	M6	65	23130.0024

APPLICATION EXAMPLE

