

Adjustable Clamping Levers • with female thread

EH 24400.



PRODUCT DESCRIPTION

Adjustable clamping levers find versatile applications when the area of use is confined or a specific lever position is required.

Material

Lever

- Zinc die-cast, plastic coated, orange similar to RAL 2004, matt structure
- Zinc die-cast, plastic coated, silver, similar to RAL 9006, matt structure
- Zinc die-cast, plastic coated, black, similar to RAL 9005, matt structure

Threaded part

- Steel, blackened, quality 5

Inner parts

- Steel, blackened, quality 5.8

Operation


By lifting the lever the serrations are disengaged. The lever can be positioned by the serrations. On releasing the lever, the serrations are automatically re-engaged.

MORE INFORMATION

Notes

The threaded portion can be exchanged.


DRAWING

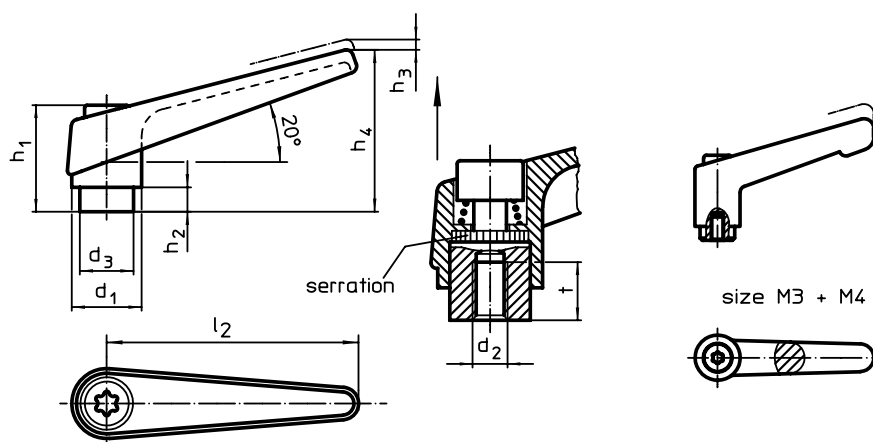

ORDER INFORMATION

Dimensions										Art. No.		
d ₁	d ₂	d ₃	h ₁	h ₂	h ₃	h ₄	l ₂	t ≥		orange	silver	black
[mm]									[g]			
13	M 3	10.0	24.5	4.0	3.5	30.5	30	7	26	24400.0032	—	24400.0034
	M 4	10.0	24.5	4.0	3.5	30.5	30	9	25	24400.0036	—	24400.0038
14	M 5	10.0	24.5	4.0	3.0	35.0	45	8	33	24400.0111	24400.0113	24400.0114
	M 6	10.0	24.5	4.0	3.0	35.0	45	8	33	24400.0121	24400.0123	24400.0124
18	M 6	13.5	31.0	6.5	3.0	45.0	62	10	67	24400.0311	24400.0313	24400.0314
	M 8	13.5	31.0	6.5	3.0	45.0	62	10	71	24400.0321	24400.0323	24400.0324
22	M 8	16.0	36.0	8.0	3.5	52.0	74	14	112	24400.0411	24400.0413	24400.0414
	M10	16.0	36.0	8.0	3.5	52.0	74	14	109	24400.0421	24400.0423	24400.0424
25	M10	19.0	43.0	11.0	4.0	63.0	89	17	176	24400.0511	24400.0513	24400.0514
	M12	19.0	43.0	11.0	4.0	63.0	89	17	171	24400.0521	24400.0523	24400.0524
30	M12	23.0	50.5	12.0	5.0	76.0	108	22	286	24400.0611	24400.0613	24400.0614
	M16	23.0	50.5	12.0	5.0	76.0	108	22	269	24400.0621	24400.0623	24400.0624

APPLICATION EXAMPLE

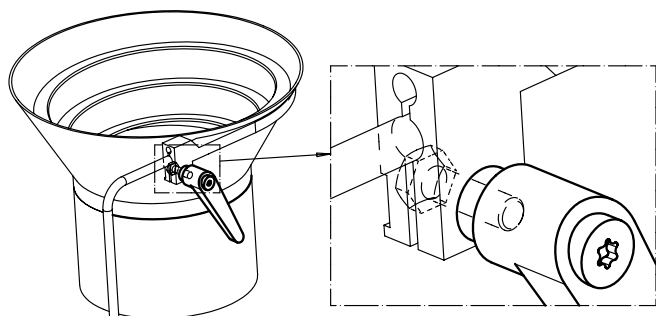

Adjustable Clamping Levers • with screw

EH 24400.



PRODUCT DESCRIPTION

Adjustable clamping levers find versatile applications when the area of use is confined or a specific lever position is required.

Material

Lever

- Zinc die-cast, plastic coated, orange similar to RAL 2004, matt structure
- Zinc die-cast, plastic coated, silver, similar to RAL 9006, matt structure
- Zinc die-cast, plastic coated, black, similar to RAL 9005, matt structure

Inner parts

- Steel, blackened, quality 5.8

Screw

- Steel, blackened, quality 5.8

Operation


By lifting the lever the serrations are disengaged. The lever can be positioned by the serrations. On releasing the lever, the serrations are automatically re-engaged.

MORE INFORMATION

Notes

The screw part can be exchanged.

DRAWING

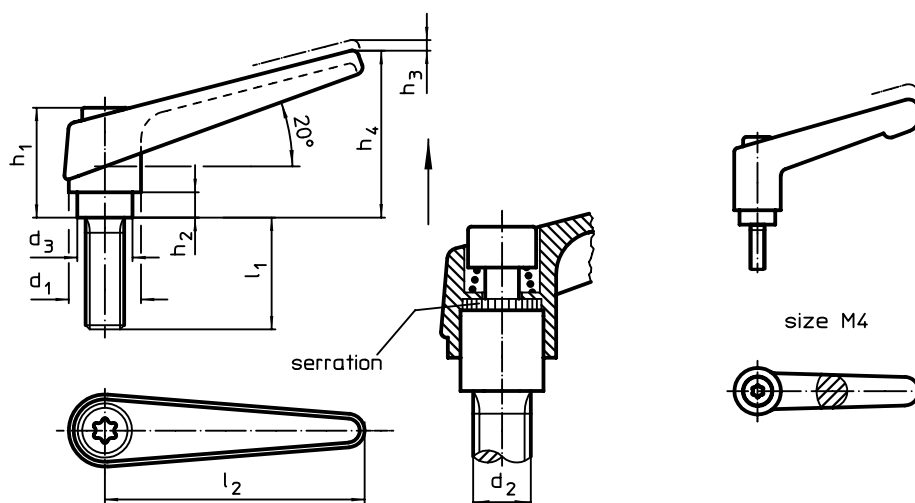


ORDER INFORMATION

Dimensions										Art. No.		
d ₁	d ₂	l ₁	d ₃	h ₁	h ₂	h ₃	h ₄	l ₂		orange	silver	black
[mm]									[g]			
13	M 4	12	10.0	24.5	4.0	3.5	30.5	30	27	24400.0010	—	24400.0012
		16	10.0	24.5	4.0	3.5	30.5	30	27	24400.0014	—	24400.0016
		20	10.0	24.5	4.0	3.5	30.5	30	28	24400.0018	—	24400.0020
		25	10.0	24.5	4.0	3.5	30.5	30	28	24400.0022	—	24400.0024
		32	10.0	24.5	4.0	3.5	30.5	30	28	24400.0026	—	24400.0028
14	M 5	12	10.0	24.5	4.0	3.0	35.0	45	36	24400.0041	24400.0043	24400.0044
		16	10.0	24.5	4.0	3.0	35.0	45	36	24400.0051	24400.0053	24400.0054
		20	10.0	24.5	4.0	3.0	35.0	45	37	24400.0061	24400.0063	24400.0064
		25	10.0	24.5	4.0	3.0	35.0	45	38	24400.0071	24400.0073	24400.0074
		32	10.0	24.5	4.0	3.0	35.0	45	38	24400.0081	24400.0083	24400.0084
	M 6	40	10.0	24.5	4.0	3.0	35.0	45	39	24400.0086	24400.0088	24400.0089
		12	10.0	24.5	4.0	3.0	35.0	45	37	24400.0131	24400.0133	24400.0134
		16	10.0	24.5	4.0	3.0	35.0	45	37	24400.0141	24400.0143	24400.0144
		20	10.0	24.5	4.0	3.0	35.0	45	39	24400.0151	24400.0153	24400.0154
		25	10.0	24.5	4.0	3.0	35.0	45	41	24400.0161	24400.0163	24400.0164
		32	10.0	24.5	4.0	3.0	35.0	45	40	24400.0171	24400.0173	24400.0174
		40	10.0	24.5	4.0	3.0	35.0	45	41	24400.0181	24400.0183	24400.0184
		50	10.0	24.5	4.0	3.0	35.0	45	43	24400.0191	24400.0193	24400.0194



Dimensions										Art. No.		
d ₁	d ₂	l ₁	d ₃	h ₁	h ₂	h ₃	h ₄	l ₂		orange	silver	black
[mm]									[g]			
18	M 6	16	13.5	31.0	6.5	3.0	45.0	62	72	24400.0221	24400.0223	24400.0224
		20	13.5	31.0	6.5	3.0	45.0	62	72	24400.0231	24400.0233	24400.0234
		25	13.5	31.0	6.5	3.0	45.0	62	74	24400.0241	24400.0243	24400.0244
		32	13.5	31.0	6.5	3.0	45.0	62	74	24400.0251	24400.0253	24400.0254
		40	13.5	31.0	6.5	3.0	45.0	62	76	24400.0261	24400.0263	24400.0264
		50	13.5	31.0	6.5	3.0	45.0	62	76	24400.0271	24400.0273	24400.0274
	M 8	63	13.5	31.0	6.5	3.0	45.0	62	80	24400.0281	24400.0283	24400.0284
		16	13.5	31.0	6.5	3.0	45.0	62	74	24400.0331	24400.0333	24400.0334
		20	13.5	31.0	6.5	3.0	45.0	62	76	24400.0341	24400.0343	24400.0344
		25	13.5	31.0	6.5	3.0	45.0	62	86	24400.0351	24400.0353	24400.0354
		32	13.5	31.0	6.5	3.0	45.0	62	86	24400.0361	24400.0363	24400.0364
		40	13.5	31.0	6.5	3.0	45.0	62	88	24400.0371	24400.0373	24400.0374
		50	13.5	31.0	6.5	3.0	45.0	62	89	24400.0381	24400.0383	24400.0384
		63	13.5	31.0	6.5	3.0	45.0	62	96	24400.0391	24400.0393	24400.0394
22	M10	20	16.0	36.0	8.0	3.5	52.0	74	128	24400.0441	24400.0443	24400.0444
		25	16.0	36.0	8.0	3.5	52.0	74	130	24400.0451	24400.0453	24400.0454
		32	16.0	36.0	8.0	3.5	52.0	74	134	24400.0461	24400.0463	24400.0464
		40	16.0	36.0	8.0	3.5	52.0	74	138	24400.0471	24400.0473	24400.0474
		50	16.0	36.0	8.0	3.5	52.0	74	143	24400.0481	24400.0483	24400.0484
		63	16.0	36.0	8.0	3.5	52.0	74	152	24400.0486	24400.0488	24400.0489
25	M12	80	16.0	36.0	8.0	3.5	52.0	74	166	24400.0491	24400.0493	24400.0494
		25	19.0	43.0	11.0	4.0	63.0	89	205	24400.0541	24400.0543	24400.0544
		32	19.0	43.0	11.0	4.0	63.0	89	209	24400.0551	24400.0553	24400.0554
		40	19.0	43.0	11.0	4.0	63.0	89	215	24400.0561	24400.0563	24400.0564
		50	19.0	43.0	11.0	4.0	63.0	89	222	24400.0571	24400.0573	24400.0574
		63	19.0	43.0	11.0	4.0	63.0	89	232	24400.0581	24400.0583	24400.0584
30	M16	80	19.0	43.0	11.0	4.0	63.0	89	244	24400.0591	24400.0593	24400.0594
		32	23.0	50.5	12.0	5.0	76.0	108	348	24400.0641	24400.0643	24400.0644
		40	23.0	50.5	12.0	5.0	76.0	108	357	24400.0651	24400.0653	24400.0654
		50	23.0	50.5	12.0	5.0	76.0	108	370	24400.0661	24400.0663	24400.0664
		63	23.0	50.5	12.0	5.0	76.0	108	386	24400.0671	24400.0673	24400.0674
		80	23.0	50.5	12.0	5.0	76.0	108	407	24400.0681	24400.0683	24400.0684

APPLICATION EXAMPLE

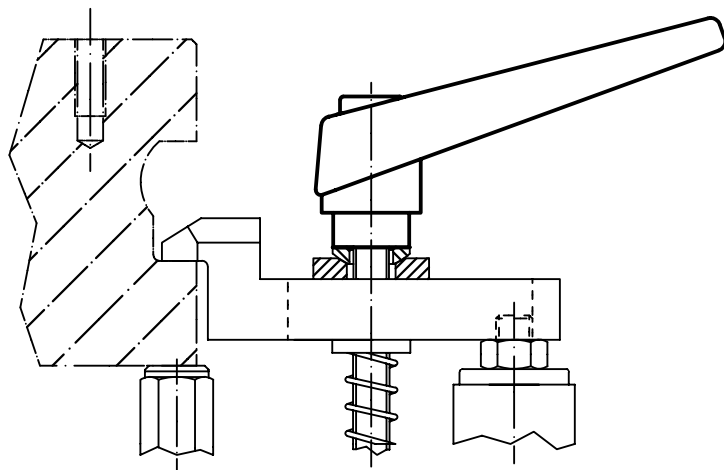

Adjustable Clamping Levers • with clamping screw

EH 24410.



PRODUCT DESCRIPTION

Adjustable clamping levers find versatile applications when the area of use is confined or a specific lever position is required.

Material

Lever

- Zinc die-cast, plastic coated, orange similar to RAL 2004, matt structure
- Zinc die-cast, plastic coated, silver, similar to RAL 9006, matt structure
- Zinc die-cast, plastic coated, black, similar to RAL 9005, matt structure

Inner parts

- Steel, blackened, quality 5.8

Screw

- Steel, blackened, quality 5.8

Operation

By lifting the lever the serrations are disengaged. The lever can be positioned by the serrations. On releasing the lever, the serrations are automatically re-engaged.

MORE INFORMATION

Notes

The screw part can be exchanged.


References

The version with ball-headed (picture 3) can be combined with the thrust piece, plastic (EH 22570.).

Further products

Thrust Pads, plastic. → p. 283

DRAWING

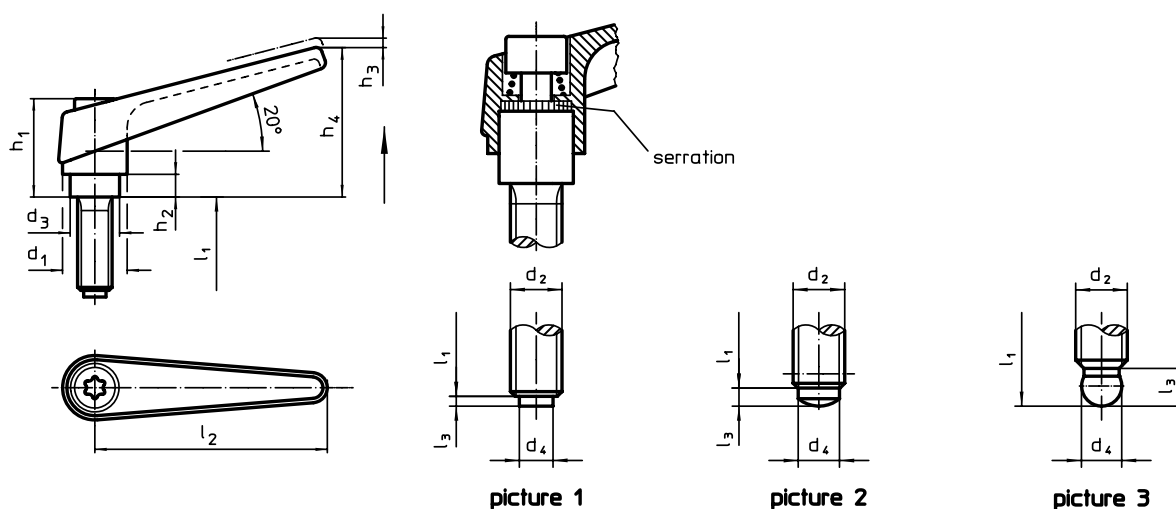

ORDER INFORMATION

Dimensions													Art. No.		
d ₁	d ₂	l ₁	d ₃	d ₄	h ₁	h ₂	h ₃	h ₄	l ₂	l ₃		orange	silver	black	
[mm]												[g]			
with plastic thrust pin – picture 1															
14	M 6	16	10.0	4.0	24.5	4.0	3	35	45	1.0	40	24410.0141	24410.0143	24410.0144	
		20	10.0	4.0	24.5	4.0	3	35	45	1.0	38	24410.0151	24410.0153	24410.0154	
		25	10.0	4.0	24.5	4.0	3	35	45	1.0	38	24410.0161	24410.0163	24410.0164	
		32	10.0	4.0	24.5	4.0	3	35	45	1.0	40	24410.0171	24410.0173	24410.0174	
		40	10.0	4.0	24.5	4.0	3	35	45	1.0	41	24410.0181	24410.0183	24410.0184	
		50	10.0	4.0	24.5	4.0	3	35	45	1.0	45	24410.0191	24410.0193	24410.0194	
18	M 8	20	13.5	6.0	31.0	6.5	3	45	62	1.0	81	24410.0341	24410.0343	24410.0344	
		25	13.5	6.0	31.0	6.5	3	45	62	1.0	80	24410.0351	24410.0353	24410.0354	
		32	13.5	6.0	31.0	6.5	3	45	62	1.0	86	24410.0361	24410.0363	24410.0364	
		40	13.5	6.0	31.0	6.5	3	45	62	1.0	81	24410.0371	24410.0373	24410.0374	
		50	13.5	6.0	31.0	6.5	3	45	62	1.0	84	24410.0381	24410.0383	24410.0384	
		63	13.5	6.0	31.0	6.5	3	45	62	1.0	95	24410.0391	24410.0393	24410.0394	
	M10	20	13.5	8.0	31.0	6.5	3	45	62	2.0	128	24410.0441	24410.0443	24410.0444	
		25	13.5	8.0	31.0	6.5	3	45	62	2.0	130	24410.0451	24410.0453	24410.0454	
		32	13.5	8.0	31.0	6.5	3	45	62	2.0	134	24410.0461	24410.0463	24410.0464	
		40	13.5	8.0	31.0	6.5	3	45	62	2.0	94	24410.0471	24410.0473	24410.0474	
		50	13.5	8.0	31.0	6.5	3	45	62	2.0	100	24410.0481	24410.0483	24410.0484	
		63	13.5	8.0	31.0	6.5	3	45	62	2.0	148	24410.0491	24410.0493	24410.0494	

