


PAK 185-240 KK

Width: 55 mm

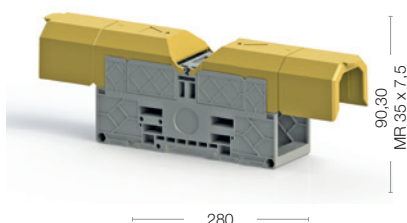

280

Cat No:

313 139

Voltage, V ~	Current, A	Cross-Section
1000	415	10-240 mm ²

DIN 46234 / DIN 46235
10 - 240 mm ²
25 - 240 mm ²
8 AWG - 500 kcmil
4 AWG - 500 kcmil
M 12
14 Nm
30 Nm

Type	Order No	Qty.


Type	Order No	Qty.
UK 240/2	472 032	5
UK 240/3	472 033	5

8/3
1/NA
IP 20
DG 10/6, D-NS 12x10, D-NS 14x10, SLF-P1W

5 pcs.

PAK 300

Width: 55 mm

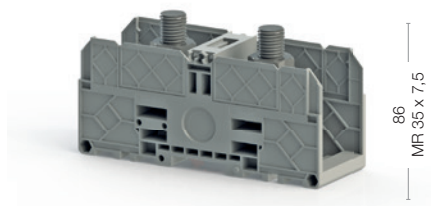

163

Cat No:

313 169

Voltage, V ~	Current, A	Cross-Section
1000	520	25-300 mm ²

DIN 46234 / DIN 46235
25 - 240 mm ²
50 - 300 mm ²
4 AWG - 500 kcmil
1/0 AWG - 600 kcmil
M 16
25 Nm
35 Nm

Type	Order No	Qty.
COVER PAK 185-300	466 203	10
	466 201	
	466 202T	


Type	Order No	Qty.
UK 300/2	472 042	5
UK 300/3	472 043	5

8/3
1/NA
IP 20
DG 10/6, D-NS 12x10, D-NS 14x10, SLF-P1W

5 pcs.

PAK 300 KK

Width: 55 mm

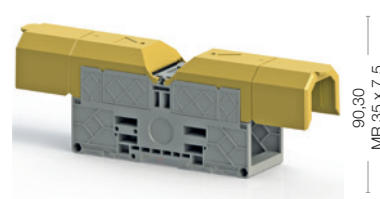

280

Cat No:

313 179

Voltage, V ~	Current, A	Cross-Section
1000	520	25-300 mm ²

DIN 46234 / DIN 46235
25 - 240 mm ²
50 - 300 mm ²
4 AWG - 500 kcmil
1/0 AWG - 600 kcmil
M 16
25 Nm
35 Nm

Type	Order No	Qty.

Type	Order No	Qty.
UK 300/2	472 042	5
UK 300/3	472 043	5

8/3
1/NA
IP 20
DG 10/6, D-NS 12x10, D-NS 14x10, SLF-P1W

5 pcs.
