

Crank Handles • with folding handle

EH 24331.



PRODUCT DESCRIPTION

Material

Axle part

- Steel, blackened

Handle

- Thermoplastic, black, dull

Handle body

- Aluminium, plastic coated, similar to RAL 9006 silver, structural matt

- Aluminium, plastic coated, similar to RAL 9005 black, matt structure


Covering

- Plastic, light grey

Operation

In the operating position the handle is locked. To move the handle to the rest position, it must be pulled out axially and flipped round.

DRAWING

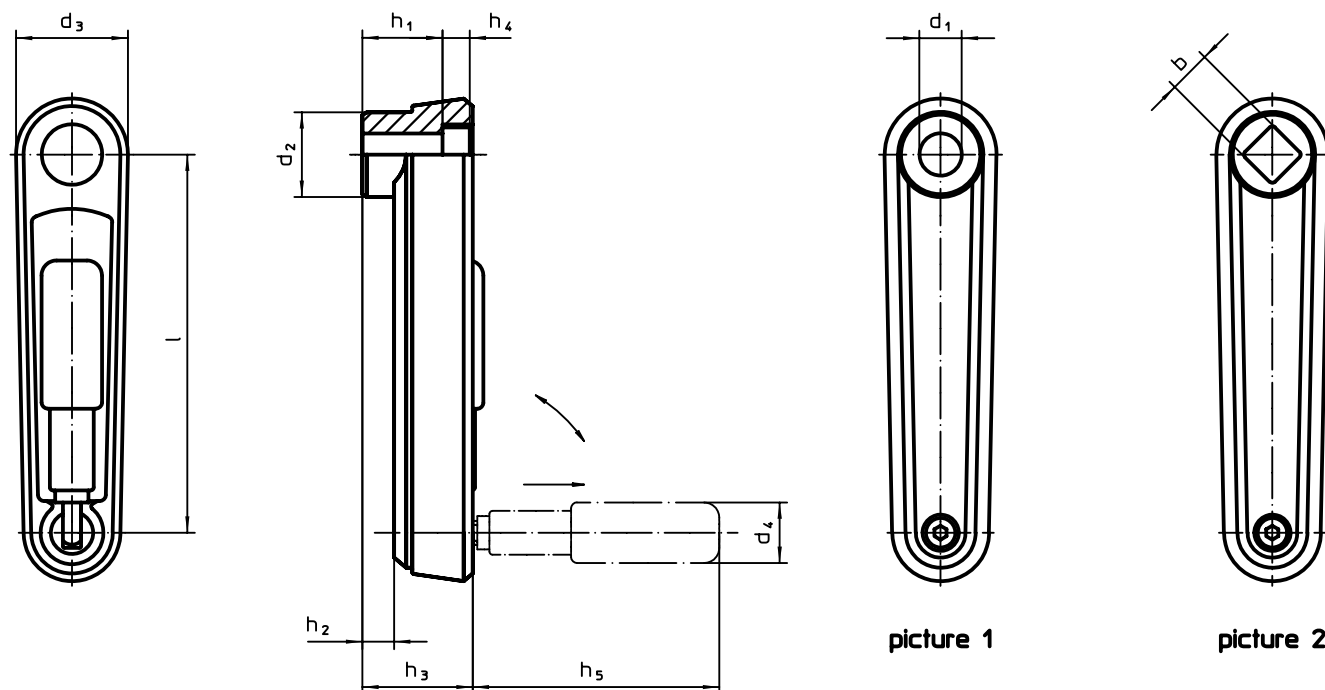

picture 1

picture 2

ORDER INFORMATION

Dimensions												Art. No.	
l	d ₁ H7	b H11	d ₂	d ₃	h ₁	h ₂ ~	h ₃	h ₄	h ₅	d ₄ Cylindrical handle ∅		silver	black
[mm]											[g]		
with smooth bore – picture 1													
80	10	–	23.0	30	19.5	4.0	25.5	4.3	43.0	16	116	24331.0005	24331.0105
100	12	–	26.7	35	23.5	5.5	29.5	4.2	57.5	18	172	24331.0010	24331.0110
125	14	–	28.0	37	30.5	10.5	36.5	4.2	76.5	24	261	24331.0015	24331.0115
with square shaft – picture 2													
80	–	10	23.0	30	19.5	4.0	25.5	4.3	43.0	16	115	24331.0205	24331.0305
100	–	12	26.7	35	23.5	5.5	29.5	4.2	57.5	18	170	24331.0210	24331.0310
125	–	14	28.0	37	30.5	10.5	36.5	4.2	76.5	24	256	24331.0215	24331.0315

Crank Handles • with folding handle, stainless steel

EH 24331.



PRODUCT DESCRIPTION

Material

Axle part

- Stainless steel 1.4305

Handle

- Thermoplastic, black, dull

Handle body

- Aluminium, plastic coated, similar to RAL 9006 silver, structural matt

- Aluminium, plastic coated, similar to RAL 9005 black, matt structure


Covering

- Plastic, light grey

Operation

In the operating position the handle is locked. To move the handle to the rest position, it must be pulled out axially and flipped round.

DRAWING

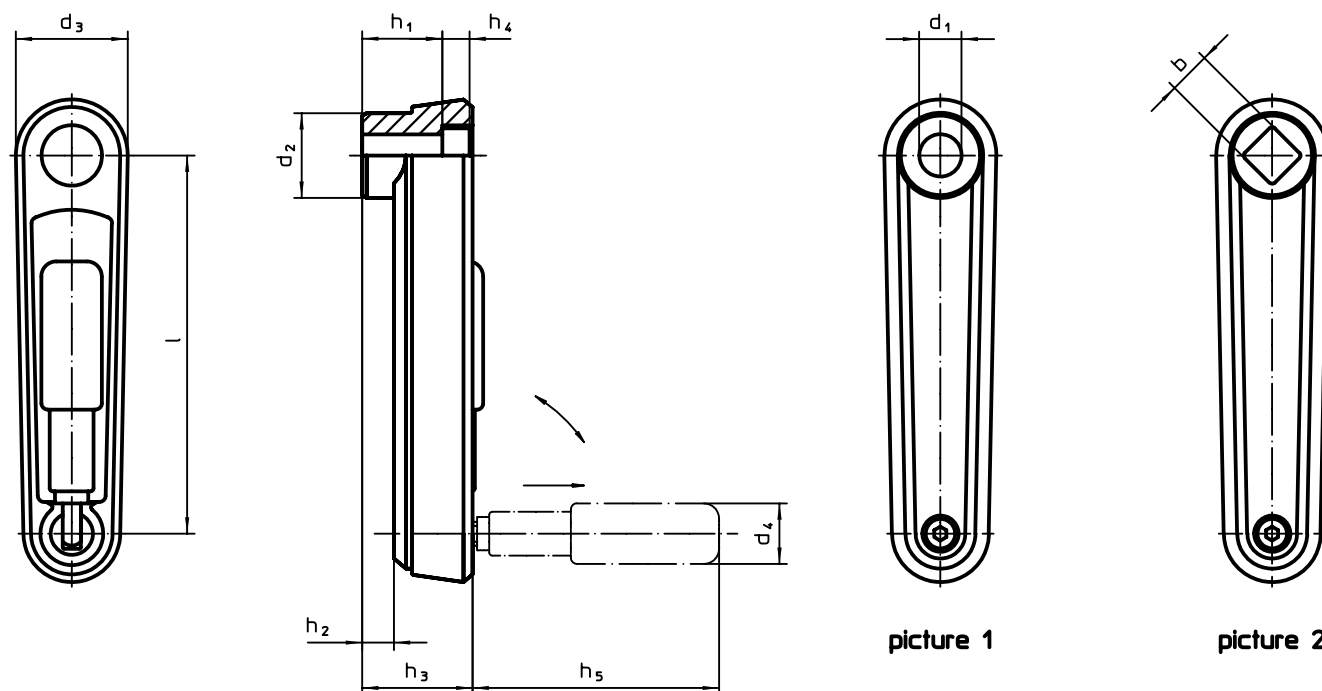

ORDER INFORMATION

l	d ₁ H7	b H11	d ₂	d ₃	Dimensions					d ₄ Cylindrical handle ∅		Art. No.	
					h ₁	h ₂ ~	h ₃	h ₄	h ₅			silver	black
					[mm]							[g]	
with smooth bore – picture 1													
80	10	–	23.0	30	19.5	4.0	25.5	4.3	43.0	16	119	24331.0405	24331.0505
100	12	–	26.7	35	23.5	5.5	29.5	4.2	57.5	18	174	24331.0410	24331.0510
125	14	–	28.0	37	30.5	10.5	36.5	4.2	76.5	24	246	24331.0415	24331.0515
with square shaft – picture 2													
80	–	10	23.0	30	19.5	4.0	25.5	4.3	43.0	16	117	24331.0605	24331.0705
100	–	12	26.7	35	23.5	5.5	29.5	4.2	57.5	18	171	24331.0610	24331.0710
125	–	14	28.0	37	30.5	10.5	36.5	4.2	76.5	24	240	24331.0615	24331.0715