

Gear Lever Handles

EH 24350.



PRODUCT DESCRIPTION

Material

Gear lever handle

- Steel, zinc-plated by galvanization, passivated
- Stainless steel 1.4305, dull blasted


Ball knob

- Thermosetting plastic PF 31, black, DIN 319


Cylindrical handle

- Thermosetting plastic PF 31, black

DRAWING

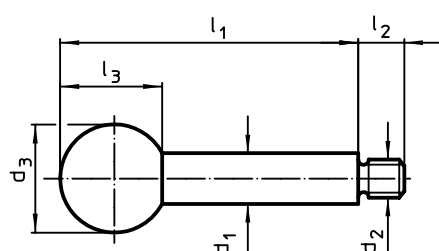

picture 1

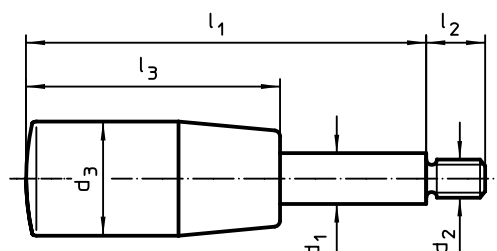

picture 2

ORDER INFORMATION

Dimensions						max. [°C]	[g]	Art. No.	
d ₁	l ₁	d ₂	d ₃	l ₂	l ₃			Steel	Stainless steel
[mm]									
with spherical knob – picture 1									
8	63	M 6	20	9	18.0	110	30	24350.0020	24350.0520
	80	M 6	20	9	18.0	110	34	24350.0022	24350.0522
	100	M 6	20	9	18.0	110	39	24350.0024	24350.0524
10	80	M 8	25	11	22.5	110	50	24350.0030	24350.0530
	100	M 8	25	11	22.5	110	62	24350.0032	24350.0532
	125	M 8	25	11	22.5	110	76	24350.0034	24350.0534
12	100	M10	32	14	29.0	110	96	24350.0040	24350.0540
	125	M10	32	14	29.0	110	118	24350.0042	24350.0542
	160	M10	32	14	29.0	110	149	24350.0044	24350.0544
14	125	M12	35	16	32.5	110	157	24350.0050	24350.0550
	160	M12	35	16	32.5	110	203	24350.0052	24350.0552
	200	M12	35	16	32.5	110	251	24350.0054	24350.0554
16	160	M14	40	18	37.0	110	310	24350.0060	–
	200	M14	40	18	37.0	110	326	24350.0062	–
	250	M14	40	18	37.0	110	397	24350.0064	–
with cylindrical handle – picture 2									
8	63	M 6	18	9	40.0	110	26	24350.0120	24350.0620
	80	M 6	18	9	40.0	110	33	24350.0122	24350.0622
	100	M 6	18	9	40.0	110	42	24350.0124	24350.0624
10	80	M 8	21	11	50.0	110	50	24350.0130	24350.0630
	100	M 8	21	11	50.0	110	62	24350.0132	24350.0632
	125	M 8	21	11	50.0	110	78	24350.0134	24350.0634
12	100	M10	23	14	65.0	110	81	24350.0140	24350.0640
	125	M10	23	14	65.0	110	103	24350.0142	24350.0642
	160	M10	23	14	65.0	110	133	24350.0144	24350.0644
14	125	M12	26	16	80.0	110	125	24350.0150	24350.0650
	160	M12	26	16	80.0	110	168	24350.0152	24350.0652
	200	M12	26	16	80.0	110	216	24350.0154	24350.0654
16	160	M14	28	18	90.0	110	214	24350.0160	–
	200	M14	28	18	90.0	110	273	24350.0162	–
	250	M14	28	18	90.0	110	352	24350.0164	–